


FINGER RELEASE

A range of releasable cable ties employing the same material as the standard ties shown on the opposite page. Incorporate a finger operated catch to release the lock. Offered with a choice of colour in various lengths.

- ◆ Releasable by operating finger catch
- ◆ Flame retardant Nylon
- ◆ Extremely strong
- ◆ Choice of colour & size

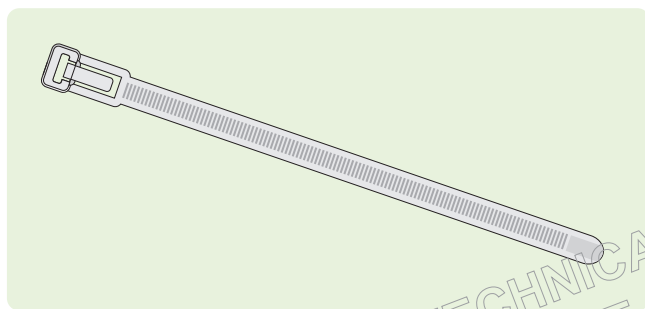

Specification

Material Nylon 6/6
flame retardant to UL94V-2
Operating temperature range -40°C to +85°C
Tensile strength As listed, which meets or exceeds requirements of MIL-S-23190

Natural Colour

Size (mm) L x W	Minimum Tensile Strength (kg)	Maximum Bundle Dia. (mm)	Manf. Part No.	anglia Order Code
125 x 7.6	22	30	01B125A	669021
150 x 7.6	22	35	01B150A	669022
200 x 7.6	22	50	01B200A	669023
300 x 7.6	22	80	01B300A	669024


Black

Size (mm) L x W	Minimum Tensile Strength (kg)	Maximum Bundle Dia. (mm)	Manf. Part No.	anglia Order Code
125 x 7.6	22	30	01B125B	669121
150 x 7.6	22	35	01B150B	669122
200 x 7.6	22	50	01B200B	669123
300 x 7.6	22	80	01B300B	669124

WEATHER RESISTANT

A range of weather resistant, self-locking, non-releasable cable ties offering a wide choice of popular sizes. Moulded from black Nylon 6/6 that contains a carbonate to give greater resistance to ultra-violet light. Manufactured in accordance with UL746C, these ties are easy to use and are ideal for outdoor applications.

- ◆ Ideal for outdoor use
- ◆ UV stabilised Nylon
- ◆ Non-releasable
- ◆ Bent tip for easier threading
- ◆ Choice of size
- ◆ Colour **Black**

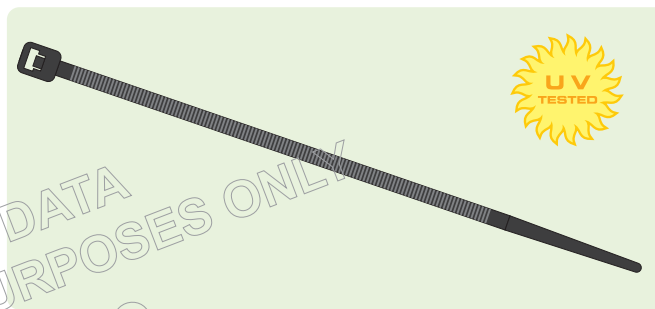

Specification

Material UV stabilised Nylon 6/6
to UL746C
Operating temperature range -40°C to +85°C
Tensile strength As listed

Black

Size (mm) L x W	Minimum Tensile Strength (kg)	Maximum Bundle Dia. (mm)	Manf. Part No.	anglia Order Code
100 x 2.5	8	25	01A100W	669141
150 x 3.6	18	39	01A150W	669142
203 x 3.6	18	55	01A200W	669143
203 x 4.6	22	55	01A203W	669144
280 x 4.8	22	81	01A280W	669145
292 x 3.6	18	85	01A292W	669146
368 x 4.8	22	102	01A368W	669147
380 x 7.6	55	110	01A380W	669148

Other sizes are available to special order. Please contact our Sales Desk to discuss your requirements.