# HEAT SHRINK TUBING



*A range of black UL and CSA approved heat shrink tubing for insulating exposed electrical connections. Shrink ratio is 2:1 with the material conforming to irregular shapes. The tubing has a high dielectric strength of 20kV/mm and is flame retardant, resistant to chemicals and meets UL224. Supplied in 1.2m lengths.*

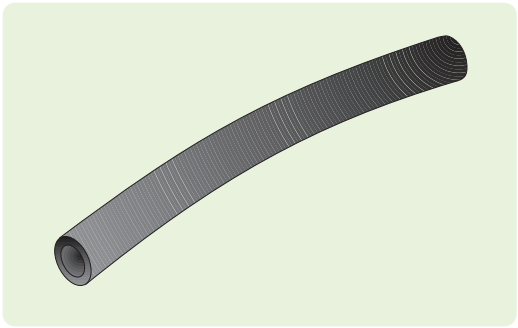

NEW

- 2:1 shrink ratio
- Conforms to irregular shapes
- Shrink temperature 90°C
- Flame retardant to VW-1
- UL and CSA approved
- Colour **Black**
- Supplied in 1.2m lengths

**Specification**

Material..... Irradiated polyolefin
Flammability rating ..... VW-1
Temperature rating ..... ø1.3 ~ 32mm, -45°C to +125°C
ø37 ~ 107.8mm, -45°C to +105°C
Voltage rating ..... 600V
Dielectric strength ..... 20kV/mm
Shrink temperature ..... 90°C

TECHNICAL DATA FOR REFERENCE PURPOSES ONLY
anglia
www.anglia.com Tel: 01945 47 47 47
info@anglia.com Fax: 01945 47 48 49

| Dimensions as Supplied (mm) | | Dimensions after Shrinkage (mm) | | Manf. | anglia |
|---|---|---|---|---|---|
| Inner Diameter | Thickness | Inner Diameter | Thickness | Part No. | Order Code |
| 1.3 | 0.20 | 0.5 | 0.33 | 06A0013B | ***669401*** |
| 2.0 | 0.20 | 0.75 | 0.36 | 06A0020B | ***669402*** |
| 2.5 | 0.20 | 1.0 | 0.44 | 06A0025B | ***669403*** |
| 3.0 | 0.20 | 1.25 | 0.44 | 06A0030B | ***669404*** |
| 3.5 | 0.25 | 1.5 | 0.44 | 06A0035B | ***669405*** |
| 4.0 | 0.25 | 1.75 | 0.44 | 06A0040B | ***669406*** |
| 4.5 | 0.25 | 2.0 | 0.44 | 06A0045B | ***669407*** |
| 5.4 | 0.25 | 2.5 | 0.56 | 06A0054B | ***669408*** |
| 6.4 | 0.25 | 3.0 | 0.56 | 06A0064B | ***669409*** |
| 7.4 | 0.25 | 3.5 | 0.56 | 06A0074B | ***669410*** |
| 8.4 | 0.25 | 4.0 | 0.56 | 06A0084B | ***669411*** |
| 9.4 | 0.25 | 4.5 | 0.56 | 06A0094B | ***669412*** |
| 10.4 | 0.25 | 5.0 | 0.56 | 06A0104B | ***669413*** |
| 11.4 | 0.25 | 5.5 | 0.56 | 06A0114B | ***669414*** |
| 12.4 | 0.25 | 6.0 | 0.56 | 06A0124B | ***669415*** |
| 13.5 | 0.30 | 6.5 | 0.69 | 06A0135B | ***669416*** |
| 14.5 | 0.30 | 7.0 | 0.69 | 06A0145B | ***669417*** |
| 15.5 | 0.30 | 7.5 | 0.69 | 06A0155B | ***669418*** |
| 16.8 | 0.30 | 8.0 | 0.69 | 06A0168B | ***669419*** |
| 18.7 | 0.35 | 9.0 | 0.77 | 06A0187B | ***669420*** |
| 21.2 | 0.35 | 10.0 | 0.77 | 06A0212B | ***669421*** |
| 23.2 | 0.40 | 11.0 | 0.77 | 06A0232B | ***669422*** |
| 26.1 | 0.45 | 12.5 | 0.87 | 06A0261B | ***669423*** |
| 29.5 | 0.50 | 14.0 | 0.87 | 06A0295B | ***669424*** |
| 32.0 | 0.50 | 15.0 | 0.87 | 06A0320B | ***669425*** |
| 37.0 | 0.50 | 17.5 | 0.87 | 06B0370B | ***669426*** |
| 43.0 | 0.50 | 20.0 | 0.97 | 06B0430B | ***669427*** |
| 53.0 | 0.50 | 25.0 | 0.97 | 06B0530B | ***669428*** |
| 68.3 | 0.55 | 30.0 | 1.07 | 06B0683B | ***669429*** |
| 88.0 | 0.60 | 40.0 | 1.17 | 06B0880B | ***669430*** |
| 107.8 | 0.60 | 50.0 | 1.17 | 06B1078B | ***669431*** |

*Other colours and longer lengths are available to special order*