


In addition to Studiomate this page lists a variety of low cost commercial grade connectors designed for general purpose use.

3.5mm JACK SOCKETS

A range of low cost commercial grade jack sockets with moulded bodies and metal bushes. Choice of mounting.

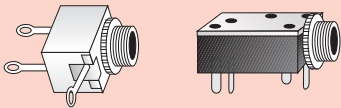
PCB MOUNTING

Stereo type available unswitched (3 hole mounting) or switched, normally closed (5 hole). Mono, switched only.

	anglia Order Code						
	Type Mono Stereo	<table border="1"> <tr> <th>Switched</th> <th>Unswitched</th> </tr> <tr> <td>621035</td> <td>—</td> </tr> <tr> <td>621025</td> <td>621024</td> </tr> </table>	Switched	Unswitched	621035	—	621025
Switched	Unswitched						
621035	—						
621025	621024						

CHASSIS MOUNTING

Switched contact, normally closed. Mounting hole 6.0mm dia. Stereo type may also be pcb mounted.

	anglia Order Code		
	Type Mono Stereo	<table border="1"> <tr> <td>621021</td> </tr> <tr> <td>621023</td> </tr> </table>	621021
621021			
621023			

STUDIOMATE 3.5mm Sockets shown on page 242

SINGLE PHONO SOCKETS

PCB Mounting

A range of low cost commercial grade phono (RCA) connectors with a choice of mounting orientation.


Vertical

Metal body with option of insulator colour. 3 hole mounting. Height above pcb 17.5mm.

	anglia Order Code		
	Type Red Black	<table border="1"> <tr> <td>622013</td> </tr> <tr> <td>622011</td> </tr> </table>	622013
622013			
622011			

Right Angle


Metal body with option of insulator colour. 4 hole mounting.

	anglia Order Code		
	Type Red Black	<table border="1"> <tr> <td>622010</td> </tr> <tr> <td>622009</td> </tr> </table>	622010
622010			
622009			

STUDIOMATE Phono Sockets shown on page 245

DC SOCKETS

A range of low cost commercial grade DC connectors. Black moulded bodies house switched contacts with connection by pcb terminations. Rated 12V, 1A. Choice of size.

	Size 2.1mm 2.5mm	anglia Order Code 621028 621029
--	-------------------------------	--

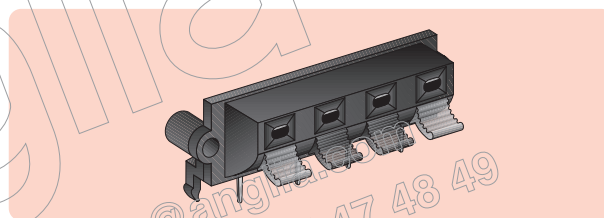
STUDIOMATE DC Sockets shown on page 255

QUICK CONNECT SPRING TERMINALS

A range of commercial grade connectors primarily designed for terminating speakers but are also widely used as low cost, quick connect terminals in many other applications. Spring-loaded levers are colour coded red and black. Choice of mounting method. Rated 1.5A, 100Vdc. Flame retardant to UL94HB.

PCB MOUNTING


Right angle pcb termination with integral snap-fit support posts. 4 way only.



Dimensions (mm)

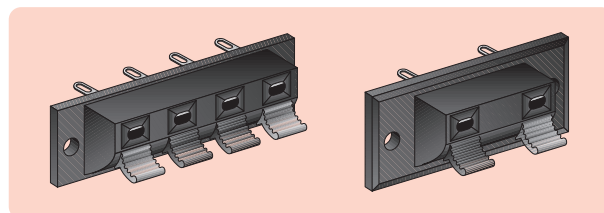
W	Overall H (above pcb)	FC	Type	anglia Order Code
65	18	58	4 way	624024

Footprint



CHASSIS MOUNTING

Rear termination via 2.8mm solder tags. Option of 2 or 4 way.



Dimensions (mm)

	W	Overall H	FC	Type	anglia Order Code
2 way	55	21	45	2 way	624032
4 way	65	18	58	4 way	624034