



VERTICAL - standard profile

5mm PITCH

5.08mm PITCH

TAICOM type TBV4/AG



TAICOM type TBV4/HG





Standard profile, 5mm pitch blocks fitted with rising clamp type wire protection guards. Choice of 2 to 12 way which may be interlocked together to increase their permutation. Access provided for test probes.

Standard profile, 5.08mm pitch blocks fitted with rising clamp type wire protection guards. Choice of 2 to 12 way which may be interlocked together to increase their permutation. Access provided for test probes.

- ◆ 5mm pitch, 10A rating
- ◆ Standard profile, 13.8mm height
- ◆ **Interlocking (double dovetail)**
- ◆ **Rising clamp** wire protection
- ◆ Green **UL94V-0** flame retardant bodies
- ◆ Brass machined inserts
- ◆ **Combi screws** suit pneumatic tools



- ◆ 5.08mm pitch, 10A rating
- ◆ Standard profile, 13.8mm height
- ◆ **Interlocking (double dovetail)**
- ◆ **Rising clamp** wire protection
- ◆ Green **UL94V-0** flame retardant bodies
- ◆ Brass machined inserts
- ◆ **Combi screws** suit pneumatic tools

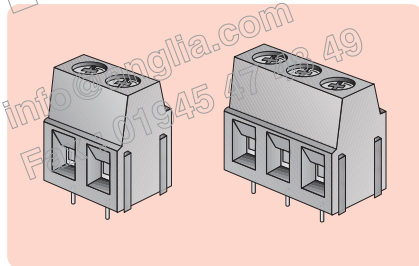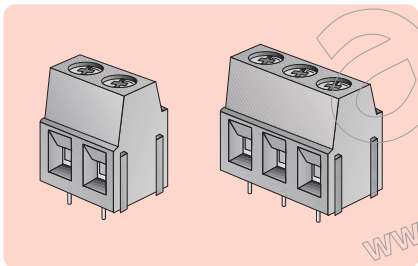

Type	Manf. Part No. & anglia Order Code
2 way	TBV402AG
3 way	TBV403AG
4 way	TBV404AG
5 way	TBV405AG
6 way	TBV406AG
7 way	TBV407AG
8 way	TBV408AG
9 way	TBV409AG
10 way	TBV410AG
11 way	TBV411AG
12 way	TBV412AG

Other ways available to special order

Type	Manf. Part No. & anglia Order Code
2 way	TBV402HG
3 way	TBV403HG
4 way	TBV404HG
5 way	TBV405HG
6 way	TBV406HG
7 way	TBV407HG
8 way	TBV408HG
9 way	TBV409HG
10 way	TBV410HG
11 way	TBV411HG
12 way	TBV412HG

Other ways available to special order


Specification

**Materials**  
 Mouldings ..... Green glass filled polyamide to UL94V-0  
 Terminals ..... Brass, machined  
 Screws ..... Steel zinc plated  
 Rising clamps ..... Brass, tin plated

**Ratings (limited by pcb)**  
 Current rating ..... 10A  
 Voltage rating ..... 300Vac  
 Oper. temp. range ..... -33°C to +120°C

**Wire Size**  
 Range ..... 12 to 22awg  
 Metric capacity ..... 4.0mm<sup>2</sup> max. (solid)  
 2.5mm<sup>2</sup> max. (stranded)

Dimensions (mm)




Specification

**Materials**  
 Mouldings ..... Green glass filled polyamide to UL94V-0  
 Terminals ..... Brass, machined  
 Screws ..... Steel zinc plated  
 Rising clamps ..... Brass, tin plated

**Ratings (limited by pcb)**  
 Current rating ..... 10A  
 Voltage rating ..... 300Vac  
 Oper. temp. range ..... -33°C to +120°C

**Wire Size**  
 Range ..... 12 to 22awg  
 Metric capacity ..... 4.0mm<sup>2</sup> max. (solid)  
 2.5mm<sup>2</sup> max. (stranded)

Dimensions (mm)



Standard Profile 5mm & 5.08mm Pitch Blocks continued overleaf > > >

## VERTICAL - standard profile

### 5mm PITCH


#### LUMBERG type KRE



Standard profile, 5mm pitch blocks fitted with rising clamp type wire protection guards. Choice of 2 to 18 way.



- ◆ 5mm pitch, 15A rating
- ◆ Standard profile, 15.5mm height
- ◆ **Rising clamp** wire protection
- ◆ Grey UL94V-2 flame retardant bodies

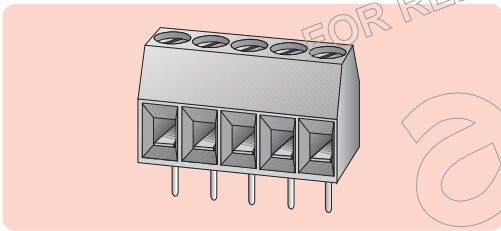

Manf. Part No. & anglia Order Code

Type	Manf. Part No. & anglia Order Code
2 way	KRE2
3 way	KRE3
4 way	KRE4
5 way	KRE5
6 way	KRE6
7 way	KRE7
8 way	KRE8
9 way	KRE9
10 way	KRE10
12 way	KRE12
18 way	KRE18

#### Specification

Body	UL94V-2 PA6.6
Current rating†	15A
Voltage rating†	250Vac
Max. wire size	4.0mm <sup>2</sup> (single) 2.5mm <sup>2</sup> (stranded)
Operating temperature range	-25 C to +100 C

† limited by pcb


#### Dimensions (mm)

Length	5 x no. ways
Height	15.5
Depth	10
Pin Size	0.8 x 1
Pitch	5

#### 36 way, splittable

A 36 way, standard profile, 5mm pitch block fitted with rising clamp type wire protection guards. May easily be cut down to the required amount of ways.

- ◆ 5mm pitch, **17.5A rating**
- ◆ Standard profile, 15.5mm height
- ◆ **36 way, splittable** to requirement
- ◆ **Rising clamp** wire protection
- ◆ Grey **UL94V-0** flame retardant body

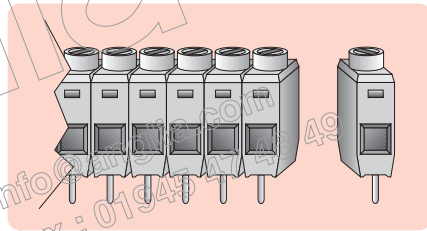

anglia Order Code

Type	anglia Order Code
36 way	464136

#### Specification

Body	UL94V-0 Polycarbonate
Current rating†	17.5A
Voltage rating†	380V
Max. wire size	4.0mm <sup>2</sup>
Max. temperature	-20 C to +125 C

† limited by pcb

#### Dimensions (mm)

Length	180
Height	15.5
Depth	8.5
Pin Size	0.7 x 1
Pitch	5

**VERTICAL - standard profile**

**5.08mm PITCH**


**TAICOM type TBV9/HG**



Standard profile, 5.08mm pitch blocks fitted with rising clamp type wire protection guards. Choice of 2 to 12 way which may be interlocked together to increase their permutation. Access provided for test probes.



- ◆ 5.08mm pitch, 10A rating
- ◆ Standard profile, 19.3mm height
- ◆ **Interlocking (double dovetail)**
- ◆ **Rising clamp** wire protection
- ◆ **Combi screws** suit pneumatic tools
- ◆ Green **UL94V-0** flame retardant bodies

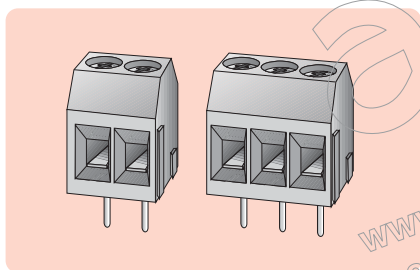

Type	Manf. Part No. & Anglia Order Code
2 way	TBV902HG
3 way	TBV903HG
4 way	TBV904HG
5 way	TBV905HG
6 way	TBV906HG
7 way	TBV907HG
8 way	TBV908HG
9 way	TBV909HG
10 way	TBV910HG
11 way	TBV911HG
12 way	TBV912HG

Other ways available to special order


**Specification**

**Materials**  
 Mouldings ..... Green glass filled polyamide to UL94V-0  
 Terminals ..... Brass, tin plated  
 Screws ..... M2.5, galvanised steel chromate finish  
 Rising clamps ..... Brass, tin plated

**Ratings (limited by pcb)**  
 Current rating ..... 10A  
 Voltage rating ..... 300Vac  
 Oper. temp. range ..... -33°C to +120°C

**Wire Size**  
 Range ..... 12 to 22awg  
 Metric capacity ..... 4.0mm<sup>2</sup> max. (solid)  
 2.5mm<sup>2</sup> max. (stranded)

**Dimensions (mm)**




**TERMINAL BLOCKS**

are fitted with 'Combi' screws

*Why?*

Because they offer all these benefits :

- combine slotted and cross head together for maximum versatility
- can accommodate both flat blade and cross point screwdrivers i.e. no dedicated tools required
- allow use of pneumatic tools

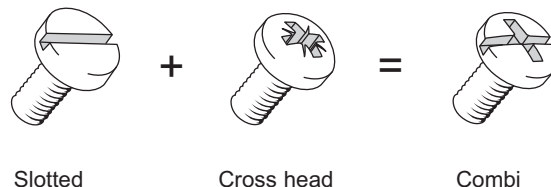

**TAICOM**

For the very latest information and news on the full range of TAICOM products available from Anglia, visit our website : [www.anglia.com/taicom](http://www.anglia.com/taicom)

Alternatively, contact our Sales Desk to discuss your specific requirements.

## VERTICAL - standard profile


### 7.5mm PITCH

#### TAICOM type TBV/EGN



Standard profile, 7.5mm pitch blocks fitted with rising clamp type wire protection guards. Choice of 2 to 12 way which may be interlocked together to increase their permutation. Holes provided for test probes.

- ◆ 7.5mm pitch, 10A rating
- ◆ 14.3mm height
- ◆ Interlocking (double dovetail)
- ◆ Rising clamp wire protection
- ◆ Combi screws suit pneumatic tools
- ◆ Black UL94V-0 flame retardant bodies

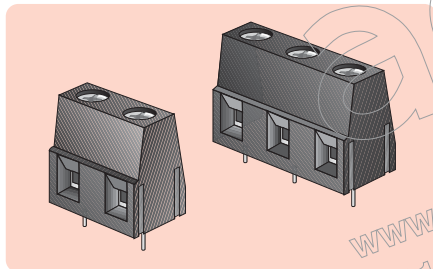

#### Type

2 way  
3 way  
4 way  
5 way  
6 way  
7 way  
8 way  
9 way  
10 way  
11 way  
12 way

#### Manf. Part No. & anglia Order Code

TBV02EGN  
TBV03EGN  
TBV04EGN  
TBV05EGN  
TBV06EGN  
TBV07EGN  
TBV08EGN  
TBV09EGN  
TBV10EGN  
TBV11EGN  
TBV12EGN

Other ways available to special order

#### Specification

##### Materials

Mouldings ..... Black glass filled polyamide to UL94V-0  
Terminals ..... Brass, tin plated  
Screws ..... M2.5, galvanised steel chromate finish  
Rising clamps ..... Brass, tin plated


##### Ratings (limited by pcb)

Current rating ..... 10A  
Voltage rating ..... 750Vac  
Oper. temp. range ..... -33°C to +120°C

##### Wire Size

Range ..... 12 to 22awg  
Metric capacity ..... 4.0mm<sup>2</sup> max. (solid)  
2.5mm<sup>2</sup> max. (stranded)

#### Dimensions (mm)




#### TAICOM type TBV2/BGN



Standard profile, 10mm pitch blocks with a single piece body and fitted with wire protection guards. Wider spacing, using alternate positions in the mouldings, offers improved isolation. Choice of 2 to 12 way. Holes provided for test probes.

- ◆ 10mm pitch, 16A rating
- ◆ Standard profile, 12.6mm height
- ◆ Single piece body
- ◆ Wide pin spacing for 240Vac
- ◆ Wire protection
- ◆ Combi screws suit pneumatic tools
- ◆ Black UL94V-0 flame retardant bodies

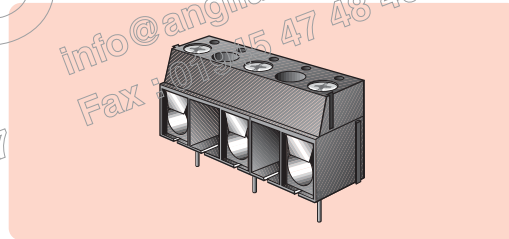

#### Type

2 way  
3 way  
4 way  
5 way  
6 way  
7 way  
8 way  
9 way  
10 way  
11 way  
12 way

#### Manf. Part No. & anglia Order Code

TBV202BGN  
TBV203BGN  
TBV204BGN  
TBV205BGN  
TBV206BGN  
TBV207BGN  
TBV208BGN  
TBV209BGN  
TBV210BGN  
TBV211BGN  
TBV212BGN

Other ways available to special order

#### Specification

##### Materials

Mouldings ..... Black glass filled polyamide to UL94V-0  
Terminals ..... Brass, tin plated  
Screws ..... M3, galvanised steel chromate finish  
Wire guards ..... Stainless steel


##### Ratings (limited by pcb)

Current rating ..... 16A  
Voltage rating ..... 750Vac  
Oper. temp. range ..... -33°C to +120°C


##### Wire Size

Range ..... 14 to 22awg  
Metric capacity ..... 2.5mm<sup>2</sup> max. (solid)  
1.5mm<sup>2</sup> max. (stranded)

#### Dimensions (mm)



The above Taicom blocks are also available with a wider 15mm pitch pin spacing. Using alternate positions in the mouldings they offer improved isolation.



VERTICAL - standard profile


10mm PITCH

LUMBERG type KRESS



Standard profile, 10mm pitch blocks fitted with wire protection guards. Wider spacing, using alternate positions within the mouldings, offers improved isolation. Choice of 2 or 3 way.

- ◆ 10mm pitch, 15A rating
- ◆ Standard profile, 14mm height
- ◆ **Wide pin spacing for 240Vac**
- ◆ Wire protection
- ◆ Grey UL94V-2 flame retardant bodies

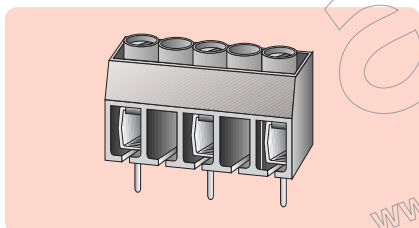

Type	Manf. Part No. & anglia Order Code
2 way	<b>KRESS3/2</b>
3 way	<b>KRESS5/3</b>

Specification

Body .....	UL94V-2 PA6.6
Current rating <sup>†</sup> .....	15A
Voltage rating <sup>†</sup> .....	750Vac
Max. wire size .....	4.0mm <sup>2</sup> (single)
	2.5mm <sup>2</sup> (stranded)
Operating temperature range.....	-25 C to +100 C

<sup>†</sup> limited by p.c.b.

Dimensions (mm)


Length .....	10 x no. ways
	less 5mm
Height .....	14
Depth .....	8.3
Pin Size .....	0.7 x 1
Pitch .....	10

LUMBERG type KREN3



A standard profile, 3 way power block on a 10mm wide pitch designed for the connection of mains. Incorporates rising clamp type wire protection guards.

- ◆ 10mm pitch, 15A rating
- ◆ Standard profile, 15.5mm height
- ◆ **3 way Mains block**
- ◆ **Rising clamp** wire protection
- ◆ Grey UL94V-2 flame retardant body

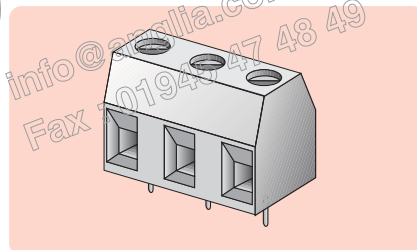

Type	Manf. Part No. & anglia Order Code
3 way	<b>KREN3</b>

Specification

Body .....	UL94V-2 PA6.6
Current rating <sup>†</sup> .....	15A
Voltage rating <sup>†</sup> .....	500Vac
Max. wire size .....	4.0mm <sup>2</sup> (single)
	2.5mm <sup>2</sup> (stranded)
Operating temperature range.....	-25 C to +100 C

<sup>†</sup> limited by p.c.b.

Dimensions (mm)

Length .....	25
Height .....	15.5
Depth .....	10
Pin Size .....	0.8 x 1
Pitch .....	10