
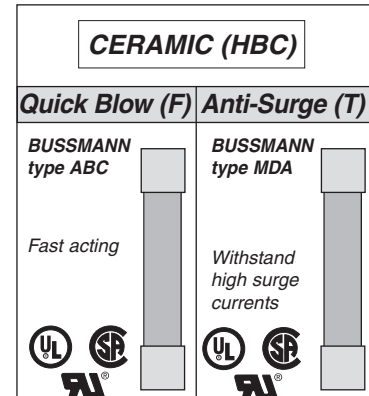


1 1/4 inch

1 1/4 inch x 1/4 inch (32mm x 6.3mm) fuses with a choice of glass or ceramic cartridge. Each type offers the option of quick blow or anti-surge with a UL listed/CSA approved alternative available in glass but standard in ceramic. N.B. Fuse illustrations are actual size.

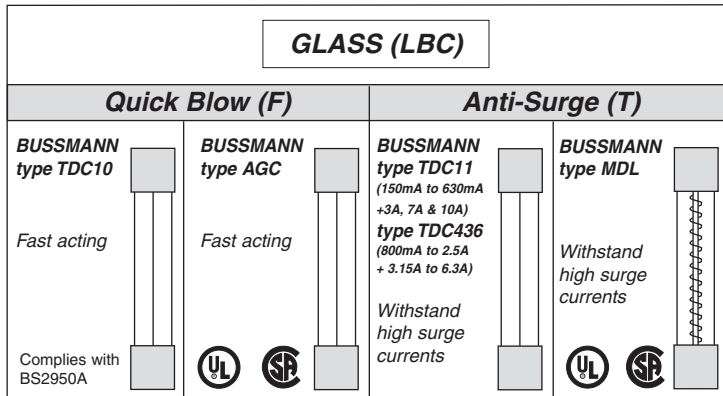

Voltage Rating(Vn)
250Vac
unless stated otherwise (see notes below)

Current Rating (In)	anglia Order Code	anglia Order Code	anglia Order Code	anglia Order Code	anglia Order Code	anglia Order Code
150mA			643158			
200mA						699208
250mA	641258	692258	643258	693258	698258	699258
500mA	641508	692508	643508	693508	698508	699508
630mA			643638			
750mA	641758	692758		693758	698758	699758
800mA			643808			
1A	641109	692109	643109	693109	698109	699109
1.25A	641129	692129	643129	693129		
1.5A	641159	692159		693159	698159	699159
1.6A	641169		643169			
2A	641209	692209	643209	693209	698209	699209
2.5A	641259	692259	643259	693259	698259	699259
3A	641309	692309	643309	693309	698309	699309
3.15A			643319			
4A	641409	692409	643409	693409	698409	699409
5A	641509	692509	643509	693509	698509	699509
6A					698609	699609
6.3A			643639			
7A	641709	692709	643709	693709	698709	699709
8A		692809		693809	698809	699809
10A	641100	692100	643100		698100	699100
12A	641120					
15A	641150				698150	699150
20A	641200				698200	699200
25A	641250				698250	699250
30A					698300	699300

NOTES	Breaking capacity 35A @ Vn except ratings 4A and above : 10 x In @ Vn (unless stated otherwise - see notes below)					
	TDC10 - Voltage rating (Vn) is 1000Vac on 250mA rating falling to 32Vac on ratings from 12A to 25A. Breaking capacity 10 x In @ Vn.	AGC - Breaking capacity 100A @ Vn on ratings from 1.25A to 3A, 200A on 4A to 10A.	TDC11 - Breaking capacity 10 x In @ Vn. TDC436 - Breaking capacity 50A @ Vn.	MDL - Breaking capacity 100A @ Vn on ratings 1.25A to 3A, 200A on 4A to 8A.	ABC - UL listing and CSA approval applicable to ratings up to 15A only, UL recognition from 20A to 30A only. Voltage rating (Vn) 32Vac on ratings from 15A to 30A. Breaking capacity 100A @ Vn on ratings from 1.5A to 3A, 200A on 4A to 10A, 1000A on 15A to 30A.	MDA - UL listing applicable to ratings up to 20A only, CSA approval up to 15A only. UL recognition applicable to 25A and 30A only. Breaking capacity 100A @ Vn on ratings from 1.5A to 3A, 200A on 4A to 10A, 1500A on 15A, 400A on 20A, 1000A on 25A and 30A.