

Date of issue: 26th February 2014

Change Notification Number: 1227

Change Title: Product range update

Affected Products:

UL94-V2 material:

CTSN434/12, CTSN434/12W, CTSN434/12R, CTSN434/12WR

UL94-V0 material:

CTSN534/12, CTSN534/12W, CTSN534/12R, CTSN534/12WR

UL94-V0 GF material:

CTSN634/12, CTSN634/12W, CTSN634/12R, CTSN634/12WR

(and smaller pole sizes derived from these)


Description:

Due to a tooling upgrade the above mentioned products will feature:

1. Guided wire entries - moulding fits the shape of the metal inserts preventing wires from straying outside the inserts.



2. Flexible fixing holes – gives greater adaptability to different fixing methods

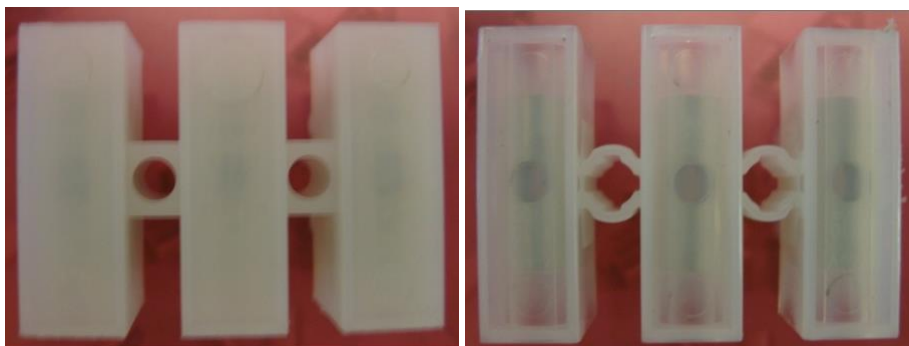

3. A higher purity polyamide will be used. This has a more transparent look and will result in no sharp edges
4. Minor dimensional changes:



5. CTSN634 only – maximum temperature is to be reduced from 180°C to 160°C

Please refer to the attached latest datasheet for full details.

For questions or concerns regarding this notification, please contact:
Michael.bridge@camdenboss.com