

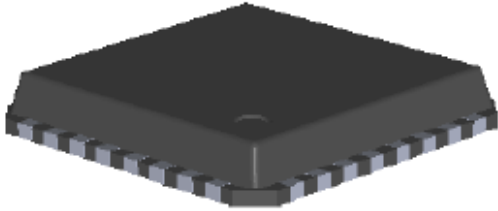
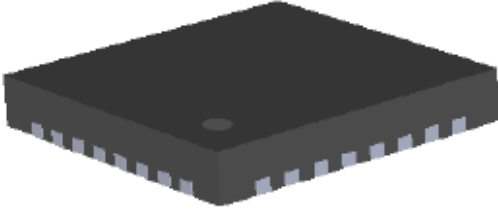




## Bill of Materials:

Package	Body Size	Material	Amkor	ASE-Korea	Remarks
LFCSP	7x7 mm	Die Attach	Ablestik 8290	Hitachi EN-4900GC	
		Wire	1.0 mil	0.8/1.0 mil	
	5x5 mm	Mold Compound	Sumitomo G700	Sumitomo G700	Same
		Leadframe	C194	C194	Same
	4x4 mm	Die Attach	Ablestik 8290	Ablestik 8290	Same
		Wire	1.0 mil	0.8/1.0 mil	
		Mold Compound	Sumitomo G700	Sumitomo G700	Same
		Leadframe	C194	C194	Same

# Bill of Materials

Body Size	Material	FROM	TO
		Amkor	ASE
6x6 mm	Die Attach	Ablestik 8290	Hitachi EN-4900GC
	Wire	1.0 mil	0.8/1.0 mil
5x5 mm	Mold Compound	Sumitomo G700	Sumitomo G700
	Leadframe	C194	C194
4x4 mm	Die Attach	Ablestik 8290	Ablestik 8290
	Wire	1.0 mil	0.8/1.0 mil
	Mold Compound	Sumitomo G700	Sumitomo G700
	Leadframe	C194	C194

# Package Outline (Punch and Sawn LFCSP)

COMPARISON	CURRENT	NEW	REMARKS
Package	Punch	Sawn	
Figure			Punch has flange edges. Sawn has sharp square edges.
Thickness	0.85 mm (Nom.) 	0.75 mm (Nom.) 	Sawn is Thinner
Foot Print			Lead width and length dimensions and tolerances are the same.