


Product Change Notification



MULTIFUSE® PPTC RESETTABLE FUSES

August, 2015 -
REVISED SEPTEMBER, 2015

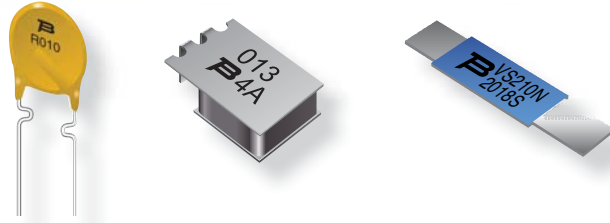


New Certification Mark for **All** Multifuse® Polymer PTC Resettable Fuses




Effective September 26, 2015 - The Bourns® Multifuse® Polymer PTC Resettable Fuses **listed below** will have a new certification mark, C-UL. The new mark certifies devices to both CSA and UL standards simultaneously. This new mark will replace the previous separate certification marks of CSA and UL. The actual devices' form, fit and function are not impacted by this change.

Previous Certification Marks	New Certification Mark
UL and CSA Separately	C-UL
	

The new C-UL certification mark can be found on the data sheet listed under “agency recognition” and on the product’s shipping labels.



Features

- High power ratings
- Compliant with AEC-Q200 Rev-C- Stress Test Qualification for Passive Components in Automotive Applications
- Low profile
- Compatible with Pb and Pb-free solder reflow profiles
- RoHS compliant* and halogen free**
- Surface mount packaging for automated assembly
- Agency recognition:   
- Standard 7555 mm (2920 mils) footprint

BOURNS® MF-LSMF Series - PTC Resettable Fuses

The Multifuse® PPTC Resettable Fuse Series that will use the new certification mark:

- | | | | | |
|--|---|--|---|---|
| <ul style="list-style-type: none"> MF-D MF-FSMF MF-LR MF-LS MF-LSMF MF-MSMF MF-NSMF | <ul style="list-style-type: none"> MF-NSML MF-PSMF MF-PSHF MF-R MF-R/90 MF-R/600 MF-RG | <ul style="list-style-type: none"> MF-RHT MF-RM MF-RX MF-RX/72 MF-RX/250 MF-S MF-SB/250 | <ul style="list-style-type: none"> MF-SM MF-SM/250 MF-SM/250V MF-SMDF MF-SMHT MF-SVS MF-USMF | <ul style="list-style-type: none"> MF-USML MF-VS MF-VS Narrow Body |
|--|---|--|---|---|

Should you have any questions or need additional information, please feel free to contact [Customer Service/Inside Sales](#).