

Sandall Road
Wisbech
PE13 2PS UK

Tel: +44 (0)1945 47 47 47

Fax: +44 (0)1945 47 48 49

Dear Customer,

Anglia have been advised by the supplier STUDIOMATE new tooling has been implemented for part number A21K506 this due to the old tooling being beyond its serviceable life span.

The below attached two documents detail the changes to the part for your evaluation.




Anglia operates a strict FIFO system within our Distribution Centre therefore it may take some time for the new product to reach customers.

Please make the relevant personnel within your organisation aware of this notification.



Yours Sincerely

Anglia

Old Version

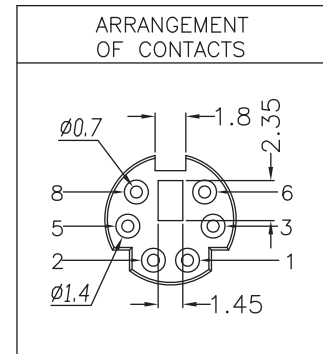
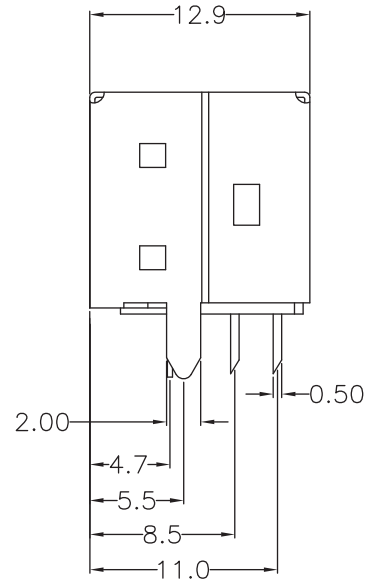
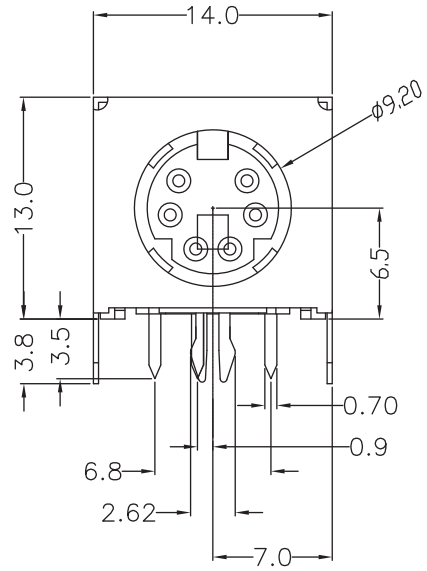


Specifications:
 Current rating: 100V AC 1A
 Voltage rating: 12V DC 2A
 Contact resistance: 30m ohm. max.
 Insulation resistance: 100M ohm. Min.
 Withstanding voltage: 250V AC for one minute
 Operating temperature range: -40°C to $+105^{\circ}\text{C}$
 Material and Finish:
 Insulator: PBT(UL94V-0)
 Standard Color: Black
 Contact: Phosphor Bronze
 Plating: Gold Plated/TIN Plated

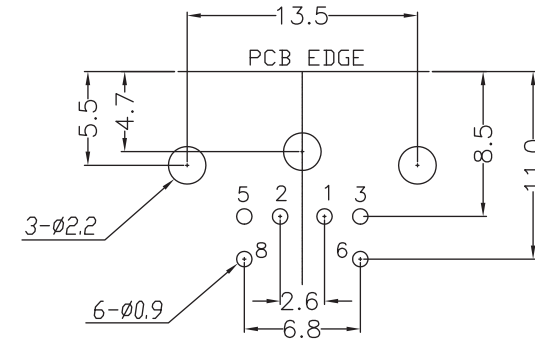


P.C.B. Layout

New Version

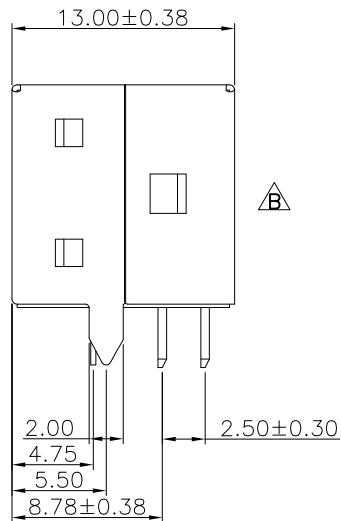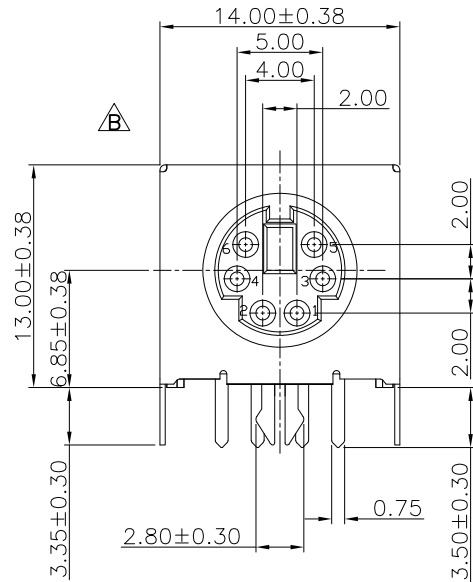

Specifications:
 Current rating: 1.5A Amp.R
 Voltage rating: DC 30V max.
 Contact resistance: 30m ohm. max.
 Insulation resistance: 500M ohm. Min.
 Withstanding voltage: 500V AC for one minute
 Operating temperature range: -25°C to $+85^{\circ}\text{C}$

Material and Finish:
 Insulator: PBT(UL94V-0)
 Standard Color: Black
 Contact: Brass
 Plating: Gold Plated On Contact Area, Tin
 30u" Min Plating On Solder Tail.
 Shell: Brass
 Plating: Nickel 15u" Plated Overall.

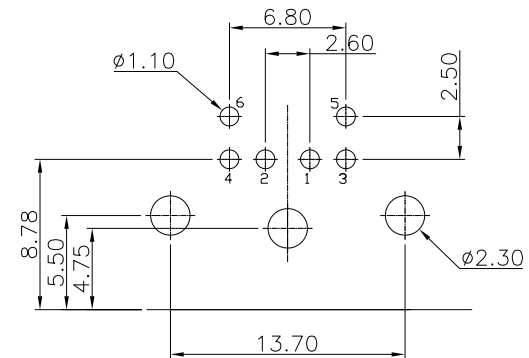

P.C.B. Layout