

23rd November 2018

Dear Customer,

Anglia have been advised by the supplier TAICOM that new tooling has been implemented due to the old tooling being no-longer serviceable. Part numbers listed below are affected by this notification.

P/N: TSB4BS


Fit, Form and Function remain the same.

Change Details:

New






Old

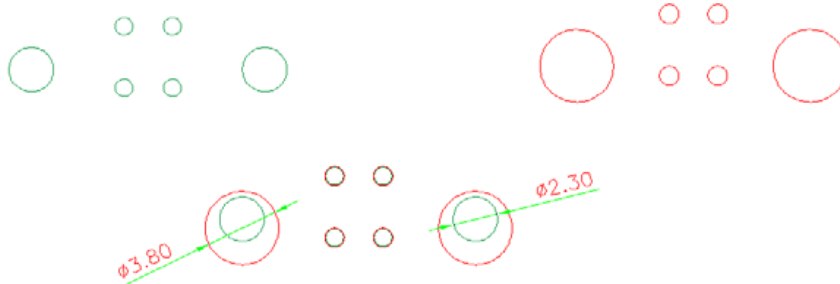

Anglia operates a strict FIFO system in our warehouse facility therefore it may take some time for this change to filter through to customer deliveries of the above part numbers.

Please make the relevant person(s) in your organisation aware of this change.

Yours Sincerely
Anglia

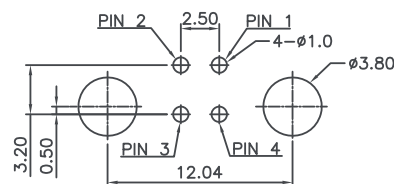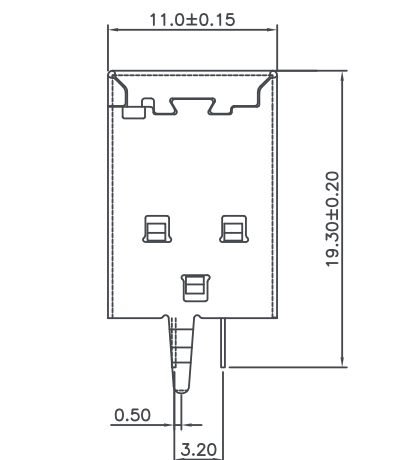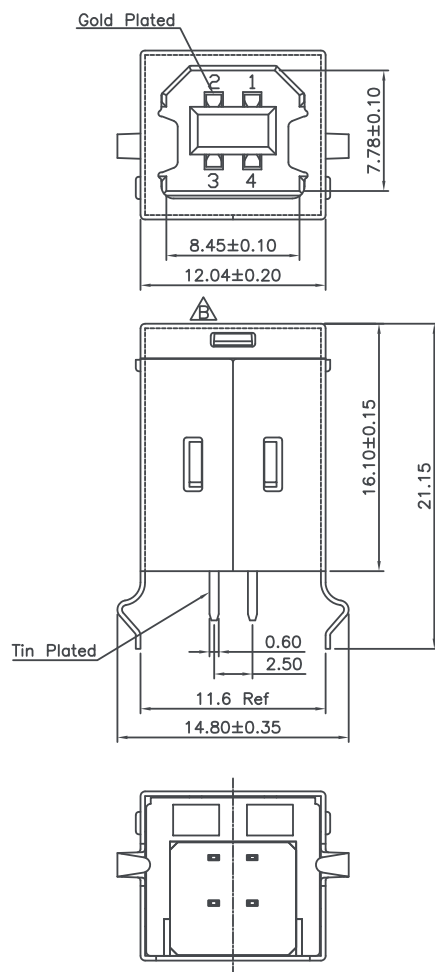

P.C.B. Layout

SPECIFICATION

| | |
|-------------------------|--|
| Current Rating : | 1A AC/DC |
| Voltage Rating : | 30V AC/DC |
| Operation Temperature : | -40°C to +105°C |
| Contact Resistance : | 20mΩ max. |
| Insulation Resistance : | 1000MΩ Min. |
| Withstand Voltage : | 750V AC/minute |
| Material & Finish | |
| Insulator : | PBT, UL94V-0 |
| Contact : | Copper Alloy |
| Plating : | Gold Plated on Contact Area Tin Plated on Solder Tail |
| Shell : | Copper Alloy, Nickel Plated |

RoHS Compliant

Taicom TSB4BS

Title : USB B Type PCB Female Socket

Tolerance (Unless Specified) :
 .x = ±0.20
 .xx = ±0.15

Dim : (mm)

Angle :

New dimensions and PCB Layout

