
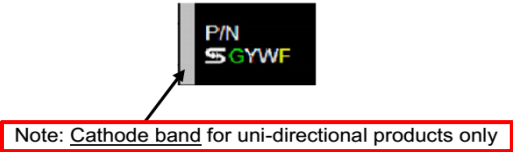


IN18008 【 Revision of SMAJ Series Datasheet 】 Comparison Report

Prepared by ART_Cheng
Checked by Johnson_Wu
Approved by HL_Lin
Issued date on 2018/7/12
Revision for A

Comparison Report

ITEM	Before	After	Evidence																																																
Datasheet	SMAJ SERIES Version: Q1705	SMAJ SERIES Version: R1807																																																	
Page.1 table	<table border="1"> <thead> <tr> <th colspan="3">KEY PARAMETERS</th> </tr> <tr> <th>PARAMETER</th> <th>VALUE</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>V_{WM}</td> <td>5 - 188</td> <td>V</td> </tr> <tr> <td>V_{BR}</td> <td>6.4 - 231</td> <td>V</td> </tr> <tr> <td>P_{PPM} t_p = 10/1000 μs waveform</td> <td>400</td> <td>W</td> </tr> <tr> <td>T_J MAX</td> <td>150</td> <td>°C</td> </tr> <tr> <td>Package</td> <td>DO-214AC (SMA)</td> <td></td> </tr> <tr> <td>Configuration</td> <td>Single</td> <td></td> </tr> </tbody> </table>	KEY PARAMETERS			PARAMETER	VALUE	UNIT	V _{WM}	5 - 188	V	V _{BR}	6.4 - 231	V	P _{PPM} t _p = 10/1000 μs waveform	400	W	T _J MAX	150	°C	Package	DO-214AC (SMA)		Configuration	Single		<table border="1"> <thead> <tr> <th colspan="3">KEY PARAMETERS</th> </tr> <tr> <th>PARAMETER</th> <th>VALUE</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>V_{WM}</td> <td>5 - 188</td> <td>V</td> </tr> <tr> <td>V_{BR}</td> <td>6.4 - 231</td> <td>V</td> </tr> <tr> <td>P_{PPM} t_p = 10/1000 μs waveform</td> <td>400</td> <td>W</td> </tr> <tr> <td>T_J MAX</td> <td>150</td> <td>°C</td> </tr> <tr> <td>Package</td> <td>DO-214AC (SMA)</td> <td></td> </tr> <tr> <td>Configuration</td> <td>Single die</td> <td></td> </tr> </tbody> </table>	KEY PARAMETERS			PARAMETER	VALUE	UNIT	V _{WM}	5 - 188	V	V _{BR}	6.4 - 231	V	P _{PPM} t _p = 10/1000 μs waveform	400	W	T _J MAX	150	°C	Package	DO-214AC (SMA)		Configuration	Single die		Complete sentence
KEY PARAMETERS																																																			
PARAMETER	VALUE	UNIT																																																	
V _{WM}	5 - 188	V																																																	
V _{BR}	6.4 - 231	V																																																	
P _{PPM} t _p = 10/1000 μs waveform	400	W																																																	
T _J MAX	150	°C																																																	
Package	DO-214AC (SMA)																																																		
Configuration	Single																																																		
KEY PARAMETERS																																																			
PARAMETER	VALUE	UNIT																																																	
V _{WM}	5 - 188	V																																																	
V _{BR}	6.4 - 231	V																																																	
P _{PPM} t _p = 10/1000 μs waveform	400	W																																																	
T _J MAX	150	°C																																																	
Package	DO-214AC (SMA)																																																		
Configuration	Single die																																																		
Page.2, 3 table title	<table border="1"> <thead> <tr> <th>Maximum peak impulse current</th> <th>Maximum clamping voltage</th> </tr> </thead> <tbody> <tr> <td>I_{PPM} (A) t_p = 10/1000 μs</td> <td>V_{C@I_{PPM}} (V) t_p = 10/1000 μs</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Maximum peak impulse current</th> <th>Maximum clamping voltage</th> </tr> </thead> <tbody> <tr> <td>I_{PPM} (A) (Note 5)</td> <td>V_{C@I_{PPM}} (V) (Note 5)</td> </tr> </tbody> </table>	Maximum peak impulse current	Maximum clamping voltage	I _{PPM} (A) t _p = 10/1000 μs	V _{C@I_{PPM}} (V) t _p = 10/1000 μs	Maximum peak impulse current	Maximum clamping voltage	I _{PPM} (A) (Note 5)	V _{C@I_{PPM}} (V) (Note 5)	<table border="1"> <thead> <tr> <th>Maximum peak impulse current</th> <th>Maximum clamping voltage</th> </tr> </thead> <tbody> <tr> <td>I_{PPM} (A) (2)</td> <td>V_{C@I_{PPM}} (V) (2)</td> </tr> </tbody> </table>	Maximum peak impulse current	Maximum clamping voltage	I _{PPM} (A) (2)	V _{C@I_{PPM}} (V) (2)	Be consistent with table title																																				
Maximum peak impulse current	Maximum clamping voltage																																																		
I _{PPM} (A) t _p = 10/1000 μs	V _{C@I_{PPM}} (V) t _p = 10/1000 μs																																																		
Maximum peak impulse current	Maximum clamping voltage																																																		
I _{PPM} (A) (Note 5)	V _{C@I_{PPM}} (V) (Note 5)																																																		
Maximum peak impulse current	Maximum clamping voltage																																																		
I _{PPM} (A) (2)	V _{C@I_{PPM}} (V) (2)																																																		
Delete Page 3 note 2, 3, 4	<p>Notes:</p> <ol style="list-style-type: none"> Non-repetitive current pulse, per Fig. 3 and derated above TA=25°C per Fig. 2 Mounted on 5 x 5mm copper pads to each terminal Lead temperature at TL=75°C Measure on 8.3ms single half sine-wave duty cycle=4 pulses per minutes maximum Peak pulse power waveform is 10/1000 μs For Bi-Directional devices having VR of 10 volts and under, the IR limit is double. 	<p>Notes:</p> <ol style="list-style-type: none"> Non-repetitive current pulse, per Fig. 3 and derated above TA=25°C per Fig. 2 Peak pulse power waveform is 10/1000μs For bi-directional devices having VR of 10 volts and under, the IR limit is double. 	Note 2, 3: Delete for extra description Note 4: Apply in figure4																																																
Page 7 Marking diagram	<p>MARKING DIAGRAM</p> 	<p>MARKING DIAGRAM</p>  <p>Note: Cathode band for uni-directional products only</p>	Add "cathode band for uni-directional products only" for clearly description.																																																

***** The copyright of document and business secret belong to TSC, and no copies should be made without any permission *****