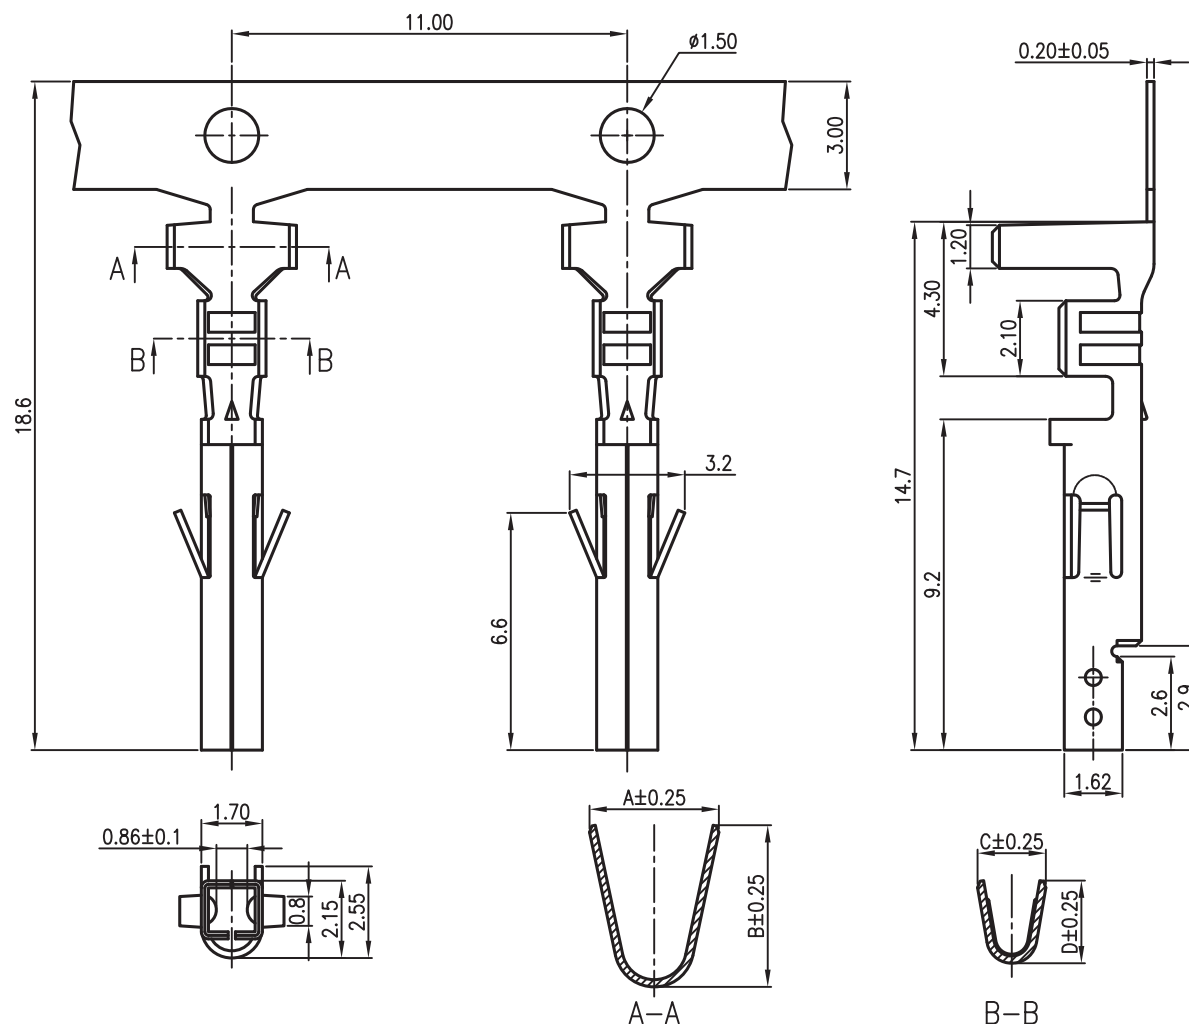


Specifications:

Current Rating: 9.0 AC/DC
 Voltage Rating: 600V AC/DC
 Contact Resistance: 10m ohm. max.
 Withstanding Voltage: 1,500V AC/minute
 Operating Temperature Range: -40°C ~ +105°C
 Application Wires: AWG16 to 26
 Mates With 2257 Series Housing
 Material and Finish
 Contact: Brass or Phosphor Bronze
 Finish: Tin Plated
 Packing: See Table

Reel	Loose	AWG
TM4012	TM4022	18-24
TM4010	TM4020	22-28

To be used with receptacle TMFxxFC

Wire	A	B	C	D	Q'ty/Reel
18-24AWG	3.6	4.5	1.9	2.3	4,000Pcs
22-28AWG	2.3	2.3	1.8	1.65	5,000Pcs

RoHS Compliant





Taicom TM40xx

Title : 4.2mm Socket Crimp Terminal for TMFxxFC

Tolerance (Unless Specified) :
 .x = ± 0.2
 .xx = ± 0.15


Dim : (mm)

Angle :

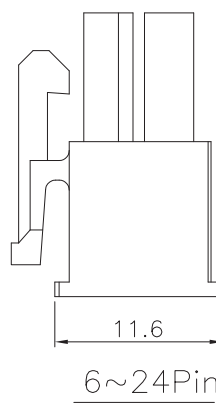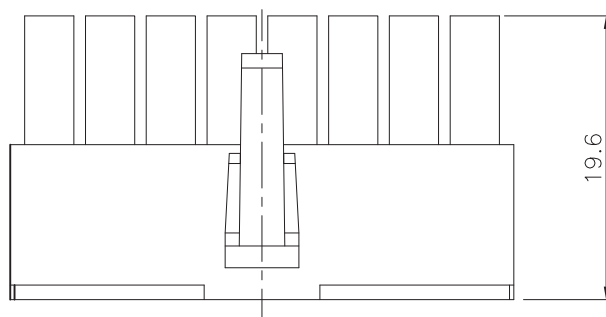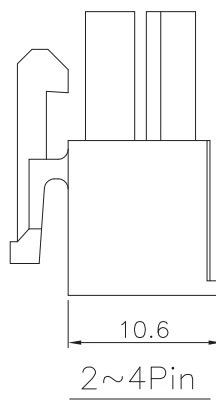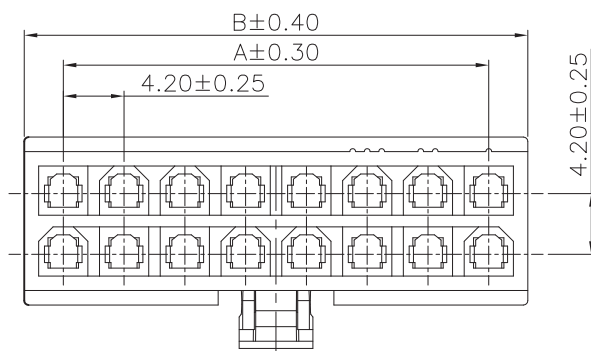

Specifications:

Current Rating: 9.0A AC/DC
Voltage Rating: 600V AC/DC
Contact Resistance: 10m Ohm. Max.
Insulation Resistance: 1,000M Ohm. Min.
Withstanding Voltage: 1500V AC/Minute
Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$



Material And Finish:

Insulator: Nylon 66 (UL94V-0)
Color: White

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2		5.40	14	25.20	30.60
4	4.20	9.60	16	29.40	34.80
6	8.40	13.80	18	33.60	39.00
8	12.60	18.00	20	37.80	43.20
10	16.80	22.20	22	42.00	47.40
12	21.00	26.40	24	46.20	51.60

RoHS Compliant

NOTE :

To be used with Crimp sockets

Reel :- TM4012 (18-24AWG) TM4010 (22-28AWG)

Loose :- TM4022 (18-24AWG) TM4020 (22-28AWG)