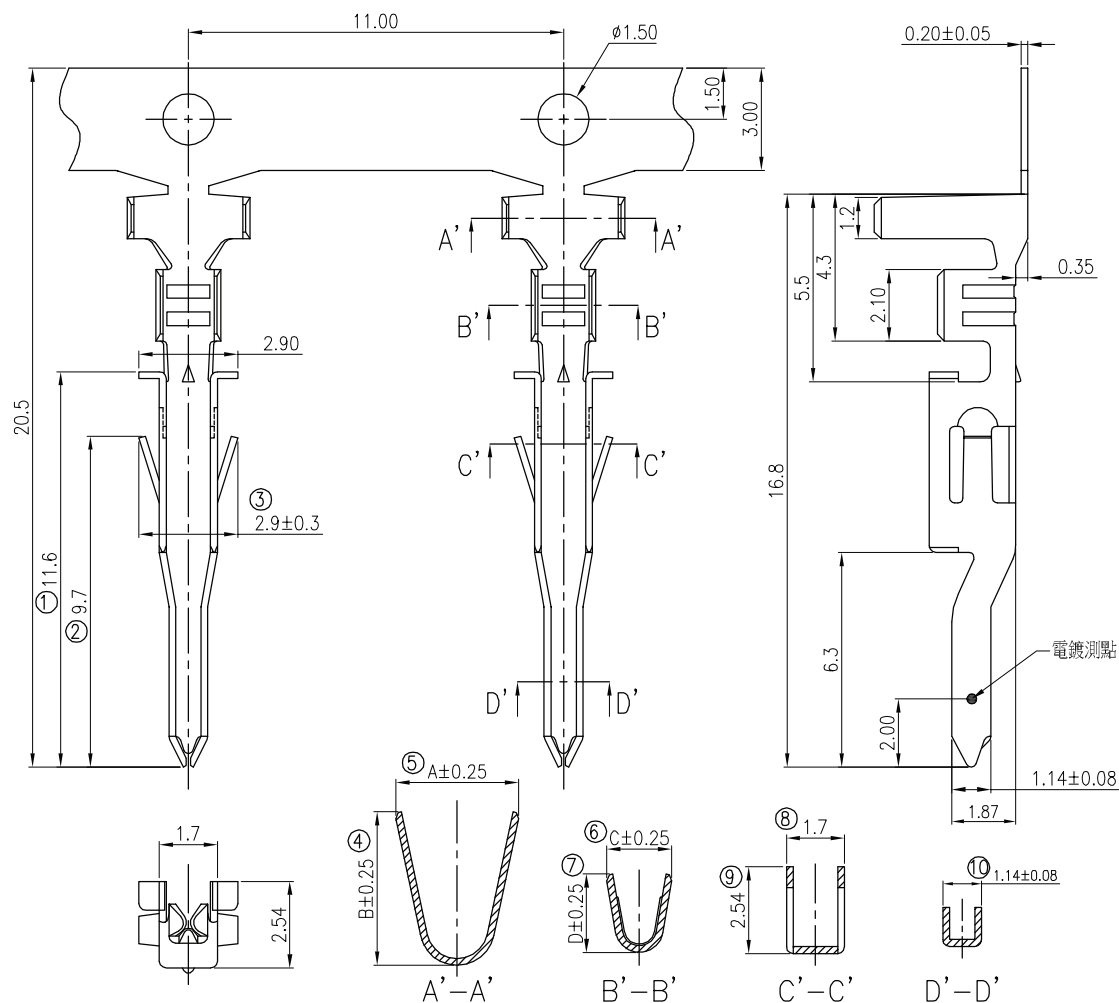


Specifications:





Current Rating:9.0 AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m ohm. max.
Withstanding Voltage:1,500V AC/minute
Operating Temperature Range:-40°C~+105°C
Application Wires:AWG16 to 28
Mates With 2259 Series Housing
Material and Finish
Contact:Brass or Phosphor Bronze
Finish:Tin Plated
Packing:See Table

Wire	A	B	C	D	INS. O.D.	Q'ty/Reel
18-24AWG	3.6	4.5	1.9	2.3	1.3-3.1	4,000Pcs
22-28AWG	2.3	2.3	1.8	1.65	0.9-1.8	5,000Pcs


Reel	Loose	AWG
TM4021	TM4023	18-24
TM4024	TM4025	22-28

To be used with receptacle TMFxxMC

RoHS Compliant



With Ear Type




Without Ear Type

Dimension:

Pos	Dim.A	Dim.B	Dim.C	Dim.D	Pos	Dim.A	Dim.B	Dim.C	Dim.D
02	—	5.4	10.8	5.8	14	25.2	30.6	36.0	31.1
04	4.2	9.6	15.0	10.0	16	29.4	34.8	40.2	35.3
06	8.4	13.8	19.2	14.2	18	33.6	39.0	44.4	39.5
08	12.6	18.0	23.4	18.4	20	37.8	43.2	48.6	43.7
10	16.8	22.2	27.6	22.6	22	42.0	47.4	52.8	47.9
12	21.0	26.4	31.8	26.8	24	46.2	51.6	57.0	52.1


Specifications:

Current Rating:9.0A AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m Ohm. Max.
Insulation Resistance:1000M Ohm. Min.
Withstanding Voltage:1500V AC/Minute
Operating Temperature Range:−40°C To +105°C



Material:

Insulator:Nylon 66 (UL94V-0)
Insulator Color:White

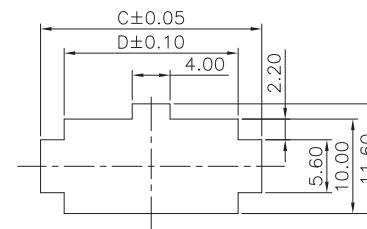

Recommended Panel Hole Dimension
Recommended Thickness:1.4–2.54mm

RoHS Compliant

NOTE :

To be used with Crimp Pins

Reel :- TM4021 (18-24AWG) TM4024 (22-28AWG)

Loose :- TM4023 (18-24AWG) TM4025 (22-28AWG)