



Public Products List

Public Products are off the shelf products. They are not dedicated to specific customers, they are available through ST Sales team, or Distributors, and visible on ST.com

PCI Title : ST Calamba (Philippines) CHANGE OF CARRIER TAPE SUPPLIER for 3CP40618 (Wi 12mm QFN 5x5), 3CP20434 (Wi 16mm QFN 6x6) & 3CP40620 (Wi 16mm QFN 8x8)

PCI Reference : MDG/22/13741

Subject : Public Products List

Dear Customer,

Please find below the Standard Public Products List impacted by the change.

BLUENRG-332AC	BLUENRG-332AT	BLUENRG-345MC
BLUENRG-345AT	BLUENRG-232	BLUENRG-355AT
BLUENRG-MSQTR	BLUENRG-132	BLUENRG-248
BLUENRG-355MC	BLUENRG-355MT	BLUENRG-355AC
BLUENRG-232N	BLUENRG-345MT	BLUENRG-345AC



IMPORTANT NOTICE – PLEASE READ CAREFULLY

Subject to any contractual arrangement in force with you or to any industry standard implemented by us, STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.


Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

PCI - CHANGE OF SUPPLIER FOR 3CP40618 (CARRIER TAPE Wi 12mm QFN/LGA/PFLAT 5x5x1)


WHAT is the change?

Change of supplier for ST material code reference: 3CP40618 (CARRIER TAPE Wi 12mm QFN/LGA/PFLAT 5x5x1) from PEAK to ADVANTEK which affected ST CALAMBA.

CURRENT: PEAK

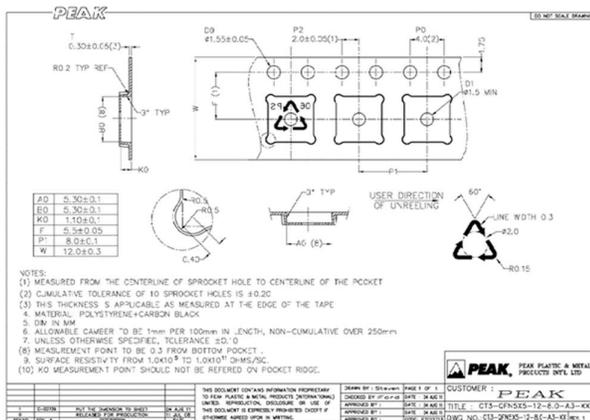

NEW: ADVANTEK

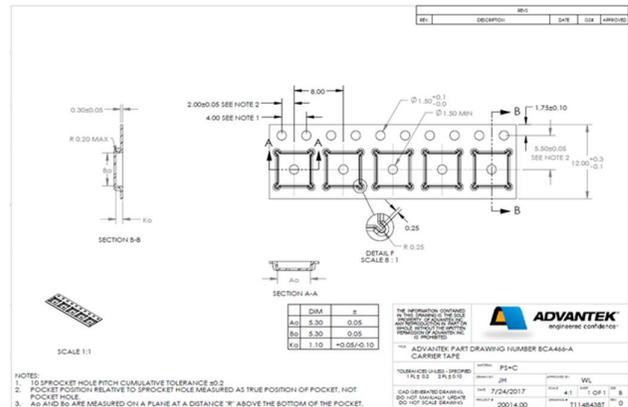

WHY?

- PEAK has declared to discontinue production of 3CP40618.

HOW will the change be qualified?

- Pls refer to attached qualification reports in Appendix 2.

IMPACTS of the Change

Form: No change on product
 Fit: No change on product
 Function: No change on product
 Reliability: No change on product
 Processability: No change on product

APPENDICES:

- APPENDIX 1 Risk assessment
- APPENDIX 2 Qualification plan
- APPENDIX 3 Qualification results

APPENDIX 1: RISK ASSESSMENT

#	Risks identified	Potential risk resulting from	Class (Low / Medium)	Considered action
1	Insufficient lead protection from accidental drops up to 4 ft height	Units cannot be soldered at PCBA due to bent leads	Medium	Perform drop test from 4 ft height to ensure no bent leads
2	Insufficient clearance between leads and carrier tape pocket	Bent leads due to mechanical contact	Medium	Perform fit analysis considering all potential combinations for carrier tape vs package dimensions
3	Opened/improper cover tape sealing	Units drop out of carrier tape	Medium	Perform peel off strength test to ensure it meets ST requirements
4	Device malfunction	EOS damage due to ESD	Medium	Perform validation for ESD protection compliance
5				
6				
7				
8				
9				

APPENDIX 2: QUALIFICATION PLAN

- Visual inspection report
- Drop Test, Peel Test and ESD Test
- Fit Analysis

APPENDIX 3: QUALIFICATION EXECUTION & RESULTS


Visual Inspection Report

Visual inspection	Results
Does not contain stain or foreign material	Passed
No Damage	Passed
No Burr	Passed
Orientation	Passed
The component does not protrude above the top surface of the carrier tape	Passed
The component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.	Passed
Lateral movement of the component is restricted to 1.0mm maximum	Passed

Drop Test, Peel Test and ESD Test

Test	Result
Drop Test Result	Passed
Peel Test Result	Passed
ESD Test Result	Passed

CADFIT SIMULATION

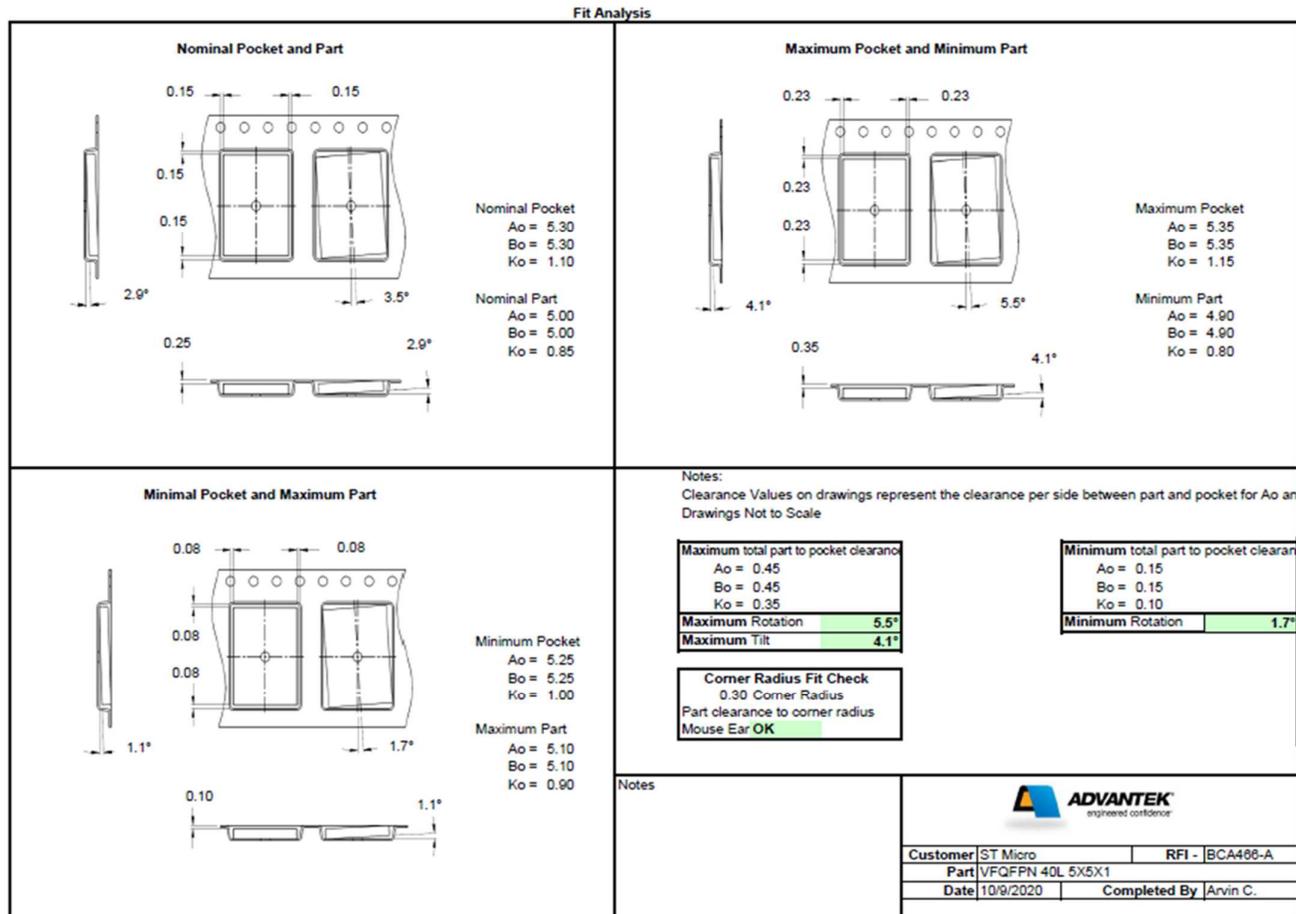


Results : Passed



Sufficient clearance available between leads and carrier tape cavity

Conclusion


Based on above material qualification, the 12mm carrier tape from Advantek for QFN 5x5x1mm passed the Calamba requirement and can be used for normal tape and reeling process.

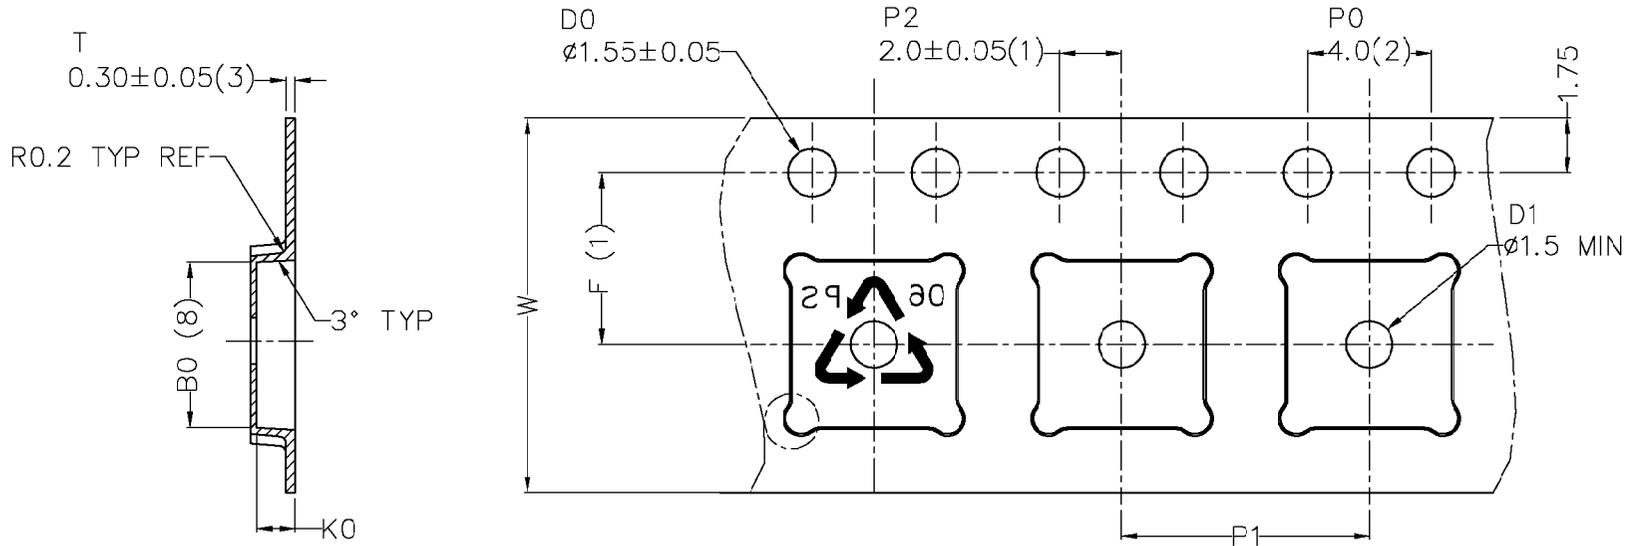

A0	5.30±0.1
B0	5.30±0.1
K0	1.10±0.1
F	5.5±0.05
P1	8.0±0.1
W	12.0±0.3




USER DIRECTION OF UNREELING

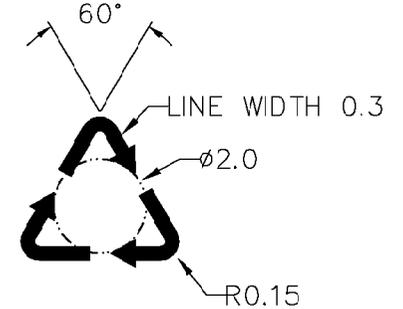

NOTES:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE PCKET
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ±0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
- 4. MATERIAL: POLYSTYRENE+CARBON BLACK
- 5. DIM IN MM
- 6. ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
- 7. UNLESS OTHERWISE SPECIFIED, TOLERENCE ±0.10
- (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET .
- 9. SURFACE RESISTIVITY FROM 1.0×10^5 TO 1.0×10^{11} OHMS/SQ.
- (10) KO MEASUREMENT POINT SHOULD NOT BE REFERED ON POCKET RIDGE.








1	C-00735	PUT THE DIMENSION TO SHEET	04 AUG 11
0		RELEASED FOR PRODUCTION	11 JUL 08
REV.NO.	ECN #	DESCRIPTION	DATE

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PEAK PLASTIC & METAL PRODUCTS (INTERNATIONAL) LIMITED. REPRODUCTION, DISCLOSURE OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED EXCEPT IF OTHERWISE AGREED UPON IN WRITTING.

DRAWN BY : Steven	PAGE 1 OF 1
CHECKED BY : Ford	DATE : 04 AUG 11
APPROVED BY :	DATE : 04 AUG 11
APPROVED BY :	DATE : 04 AUG 11
APPROVED BY :	CODE: PTC12713

CUSTOMER :	PEAK
TITLE :	CT3-QFN5X5-12-8.0-A3-XX
DWG NO.:	CT3-QFN5X5-12-8.0-A3-XX
REV.	1

REVS				
REV.	DESCRIPTION	DATE	GS#	APPROVED

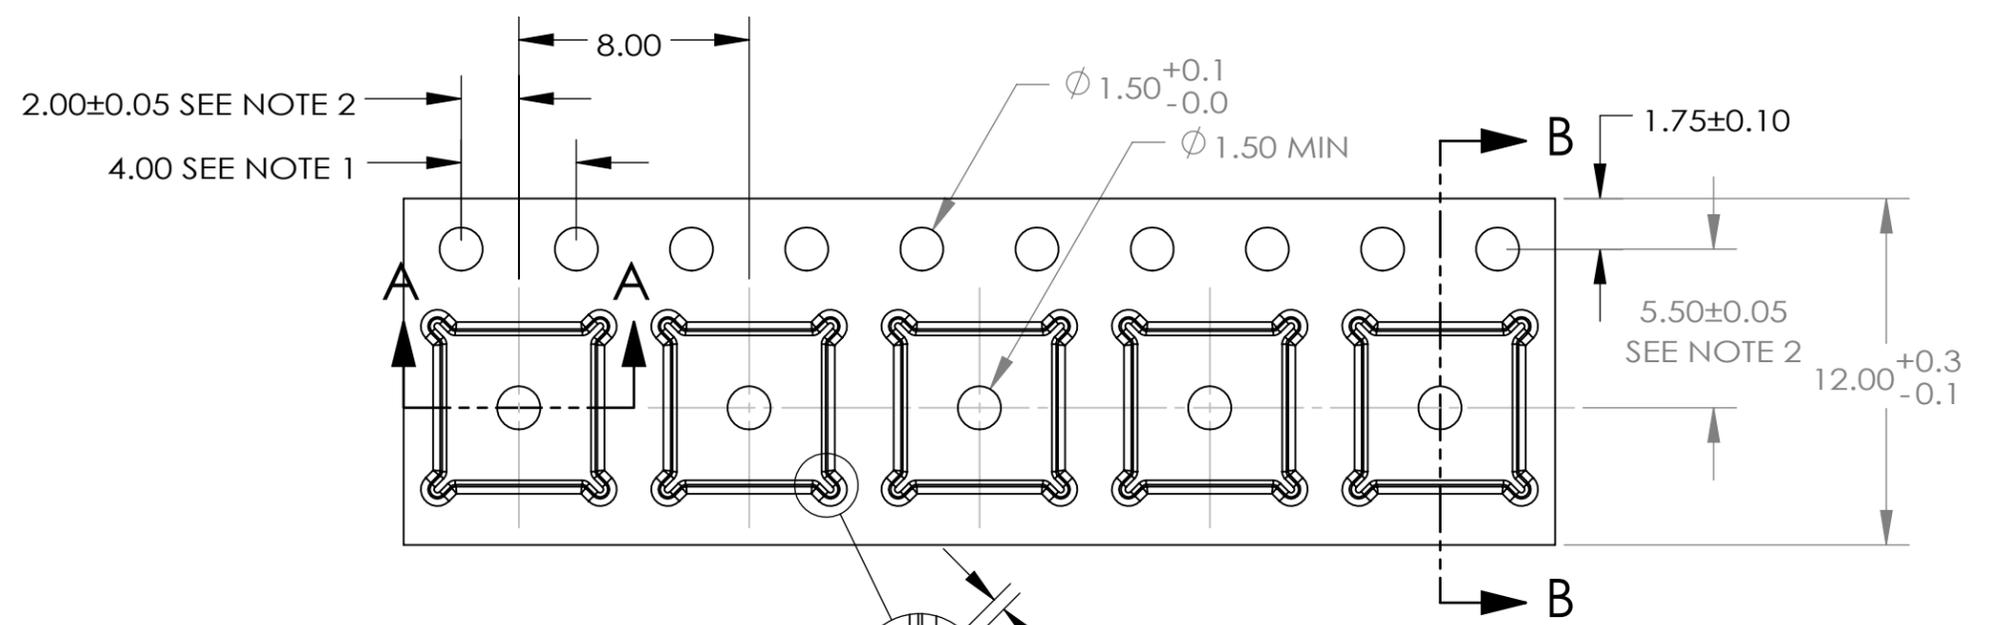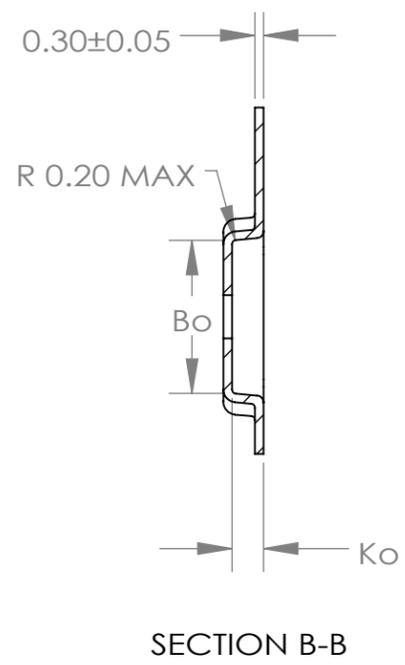

	DIM	±
Ao	5.30	0.05
Bo	5.30	0.05
Ko	1.10	+0.05/-0.10

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE.
 - Ao AND Bo ARE MEASURED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADVANTEK INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ADVANTEK INC. IS PROHIBITED.




TITLE: ADVANTEK PART DRAWING NUMBER BCA466-A CARRIER TAPE				
TOLERANCES UNLESS - SPECIFIED 1 PL ± 0.2 2 PL ± 0.10		MATERIAL PS+C	APPROVED BY: WL	
CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DO NOT SCALE DRAWING		DRAWN BY: JH	DATE 7/24/2017	SCALE 4:1
		PROJECT # 20014.00	SHEET 1 OF 1	SIZE B
		DRAWING # T114843BT		REV. 0

PCI - CHANGE OF SUPPLIER FOR 3CP20434 (CARRIER TAPE WI 16mm QFN/LGA 6x6 CND)


WHAT is the change?

Change of supplier for ST material code reference: 3CP20434 (CARRIER TAPE Wi 16mm QFN/LGA 6x6 Cnd) from PEAK to ADVANTEK which affected ST CALAMBA.

CURRENT: PEAK

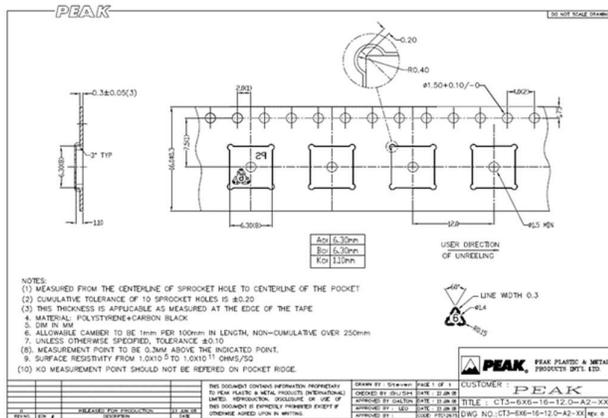

NEW: ADVANTEK

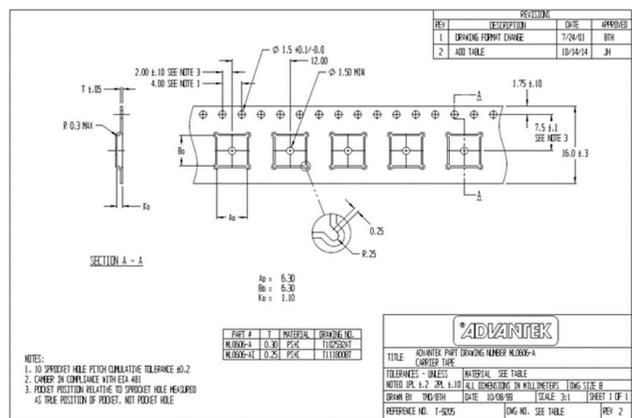

WHY?

- PEAK has declared to discontinue production of 3CP20434.

HOW will the change be qualified?

- Pls refer to attached qualification reports in Appendix 2.

IMPACTS of the Change

Form: No change on product
 Fit: No change on product
 Function: No change on product
 Reliability: No change on product
 Processability: No change on product

APPENDICES:

APPENDIX 1 Risk assessment
 APPENDIX 2 Qualification plan
 APPENDIX 3 Qualification results

APPENDIX 1: RISK ASSESSMENT

#	Risks identified	Potential risk resulting from	Class (Low / Medium)	Considered action
1	Insufficient lead protection from accidental drops up to 4 ft height	Units cannot be soldered at PCBA due to bent leads	Medium	Perform drop test from 4 ft height to ensure no bent leads
2	Insufficient clearance between leads and carrier tape pocket	Bent leads due to mechanical contact	Medium	Perform fit analysis considering all potential combinations for carrier tape vs package dimensions
3	Opened/improper cover tape sealing	Units drop out of carrier tape	Medium	Perform peel off strength test to ensure it meets ST requirements
4	Device malfunction	EOS damage due to ESD	Medium	Perform validation for ESD protection compliance
5				
6				
7				
8				
9				

APPENDIX 2: QUALIFICATION PLAN

- Visual inspection report
- Drop Test, Peel Test and ESD Test
- Fit Analysis

APPENDIX 3: QUALIFICATION EXECUTION & RESULTS

Visual Inspection Report


Visual inspection	Results
Does not contain stain or foreign material	Passed
No Damage	Passed
No Burr	Passed
Orientation	Passed
The component does not protrude above the top surface of the carrier tape	Passed
The component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.	Passed
Lateral movement of the component is restricted to 1.0mm maximum	Passed

Drop Test, Peel Test and ESD Test

Test	Result
Drop Test Result	Passed
Peel Test Result	Passed
ESD Test Result	Passed

CADFIT Simulation

FIT Test: Passed

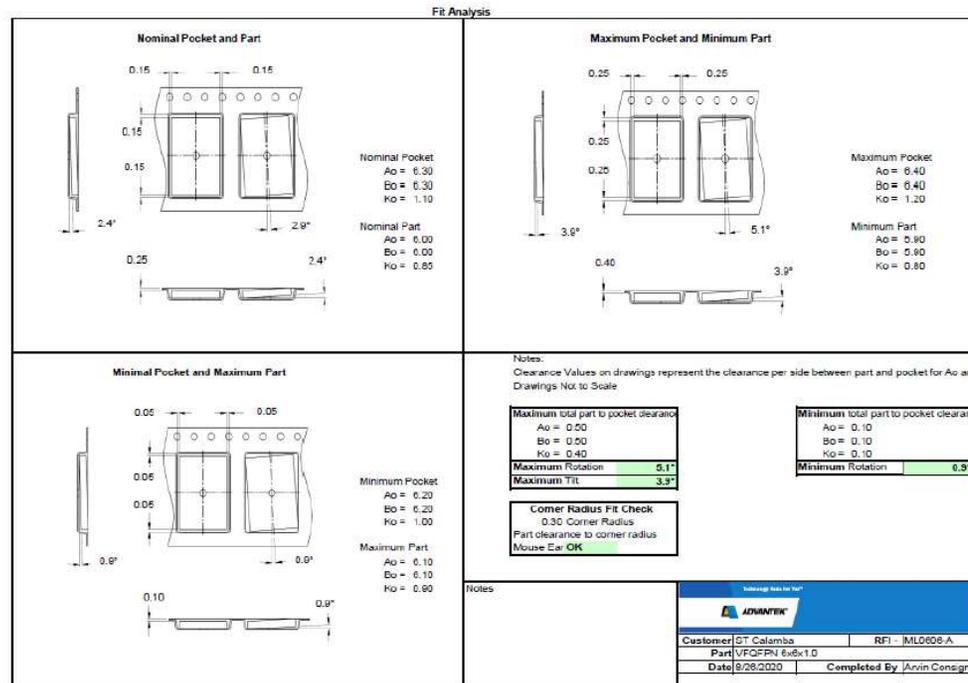


Results : Passed

Sufficient clearance available between leads and carrier tape cavity

Conclusion

Based on above material qualification, the 16mm carrier tape from Advantek for QFN 6x6 passed the Calamba requirement and can be used for normal tape and reeling process.

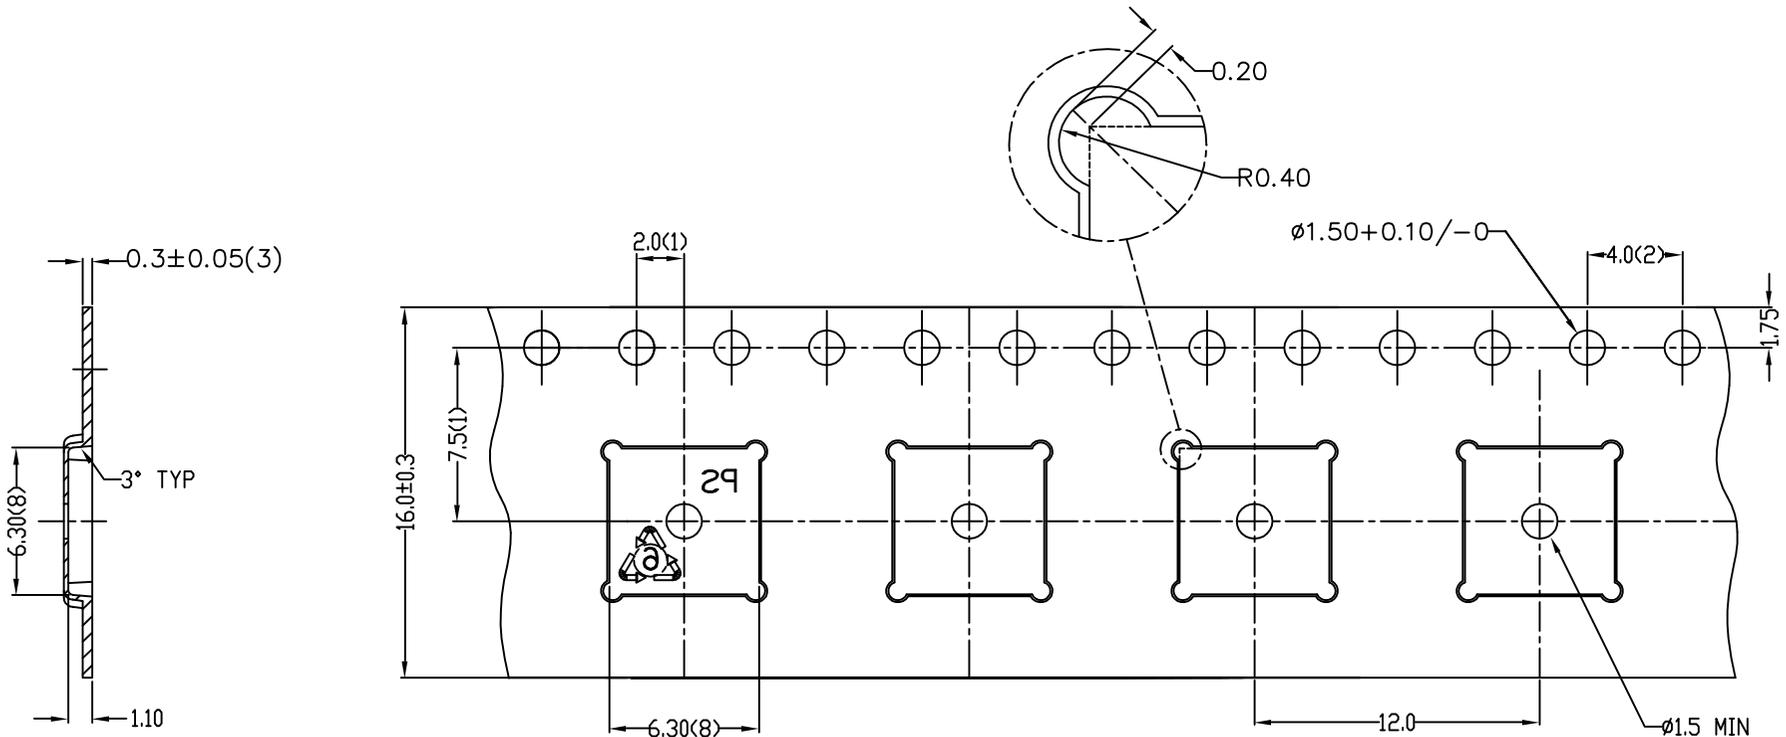


Ao:	6.30mm
Bo:	6.30mm
Ko:	1.10mm

USER DIRECTION
OF UNREELING →

NOTES:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ±0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
- 4. MATERIAL: POLYSTYRENE+CARBON BLACK
- 5. DIM IN MM
- 6. ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
- 7. UNLESS OTHERWISE SPECIFIED, TOLERANCE ±0.10
- (8). MEASUREMENT POINT TO BE 0.3MM ABOVE THE INDICATED POINT.
- 9. SURFACE RESISTIVITY FROM 1.0×10^5 TO 1.0×10^{11} OHMS/SQ
- (10) KO MEASUREMENT POINT SHOULD NOT BE REFERED ON POCKET RIDGE.

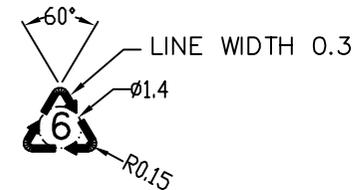

PEAK PEAK PLASTIC & METAL PRODUCTS INT'L LTD.


0		RELEASED FOR PRODUCTION	23 JUN 08
REV.NO.	ECN #	DESCRIPTION	DATE

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PEAK PLASTIC & METAL PRODUCTS (INTERNATIONAL) LIMITED. REPRODUCTION, DISCLOSURE OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED EXCEPT IF OTHERWISE AGREED UPON IN WRITING.

DRAWN BY : Steven	PAGE 1 OF 1
CHECKED BY : BUSH	DATE : 23 JUN 08
APPROVED BY : DALTON	DATE : 23 JUN 08
APPROVED BY : LEO	DATE : 23 JUN 08
APPROVED BY :	CODE: PTC12675

CUSTOMER :	PEAK
TITLE :	CT3-6X6-16-12.0-A2-XX
DWG NO.:	CT3-6X6-16-12.0-A2-XX
REV. 0	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	DRAWING FORMAT CHANGE	7/24/01	BTH
2	ADD TABLE	10/14/14	JH

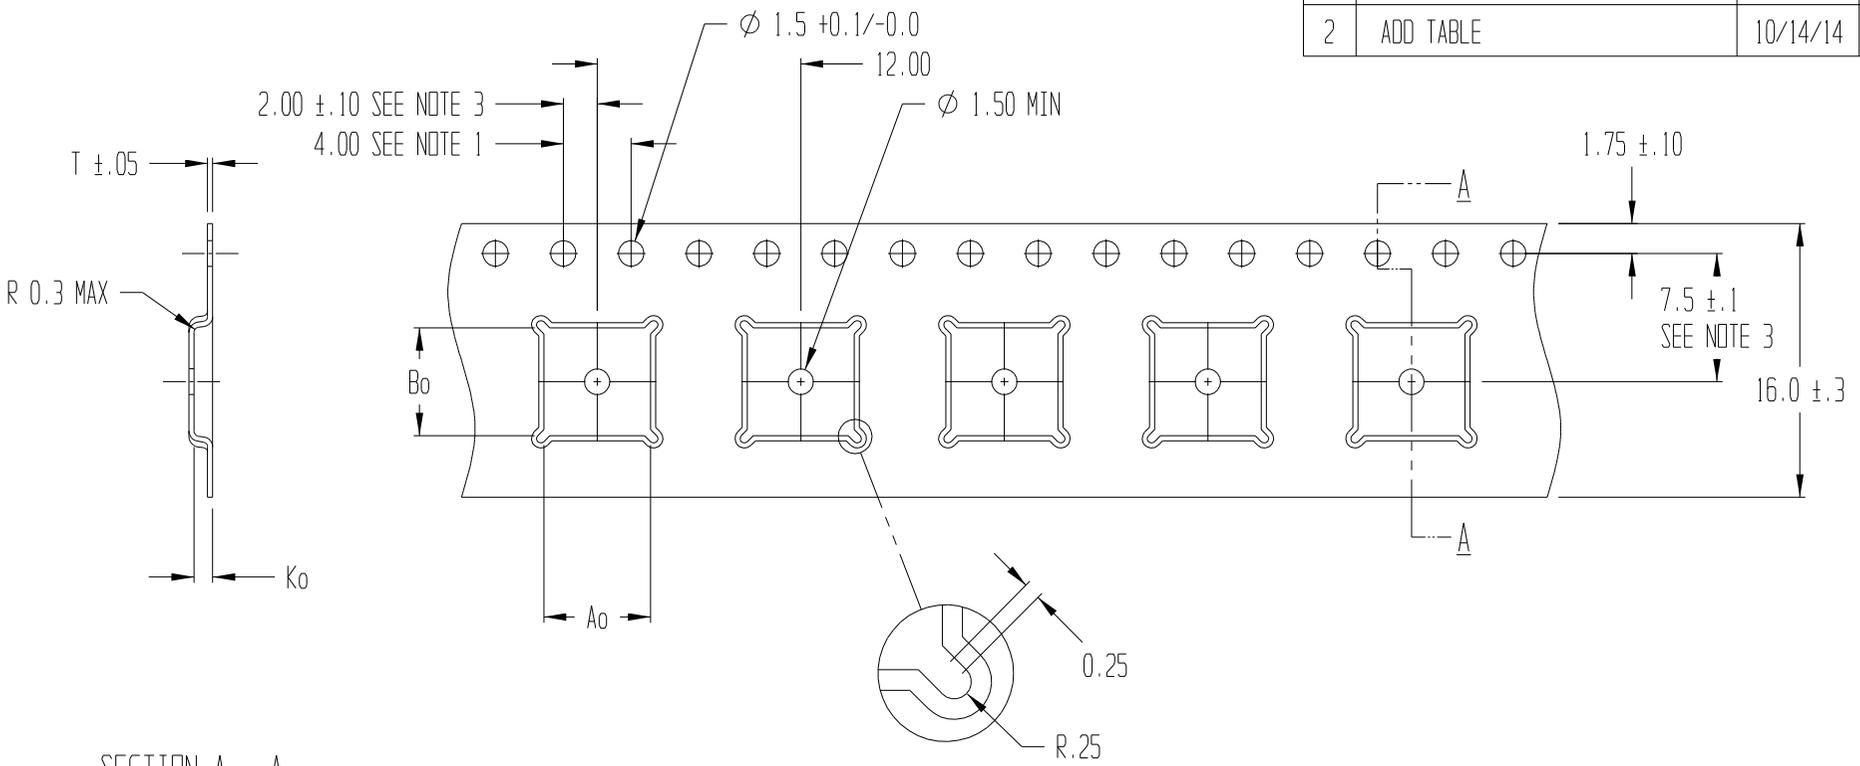

SECTION A - A

Ao = 6.30
Bo = 6.30
Ko = 1.10

PART #	T	MATERIAL	DRAWING NO.
ML0606-A	0.30	PS+C	T102532AT
ML0606-AI	0.25	PS+C	T111800BT

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
 - CAMBER IN COMPLIANCE WITH EIA 481
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE



TITLE ADVANTEK PART DRAWING NUMBER ML0606-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10		MATERIAL SEE TABLE	
		ALL DIMENSIONS IN MILLIMETERS	DWG SIZE B
DRAWN BY TMD/BTH	DATE 10/08/99	SCALE 3:1	SHEET 1 OF 1
REFERENCE NO. T-9205		DWG NO. SEE TABLE	REV 2

APPENDIX 1: RISK ASSESSMENT

#	Risks identified	Potential risk resulting from	Class (Low / Medium)	Considered action
1	Insufficient lead protection from accidental drops up to 4 ft height	Units cannot be soldered at PCBA due to bent leads	Medium	Perform drop test from 4 ft height to ensure no bent leads
2	Insufficient clearance between leads and carrier tape pocket	Bent leads due to mechanical contact	Medium	Perform fit analysis considering all potential combinations for carrier tape vs package dimensions
3	Opened/improper cover tape sealing	Units drop out of carrier tape	Medium	Perform peel off strength test to ensure it meets ST requirements
4	Device malfunction	EOS damage due to ESD	Medium	Perform validation for ESD protection compliance
5				
6				
7				
8				
9				

APPENDIX 2: QUALIFICATION PLAN

- Visual inspection report
- Drop Test, Peel Test and ESD Test
- Fit Analysis

APPENDIX 3: QUALIFICATION EXECUTION & RESULTS

Visual Inspection Report


Visual inspection	Results
Does not contain stain or foreign material	Passed
No Damage	Passed
No Burr	Passed
Orientation	Passed
The component does not protrude above the top surface of the carrier tape	Passed
The component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.	Passed
Lateral movement of the component is restricted to 1.0mm maximum	Passed

Drop Test, Peel Test and ESD Test

Test	Result
Drop Test Result	Passed
Peel Test Result	Passed
ESD Test Result	Passed

CADFIT Simulation

FIT Test: Passed

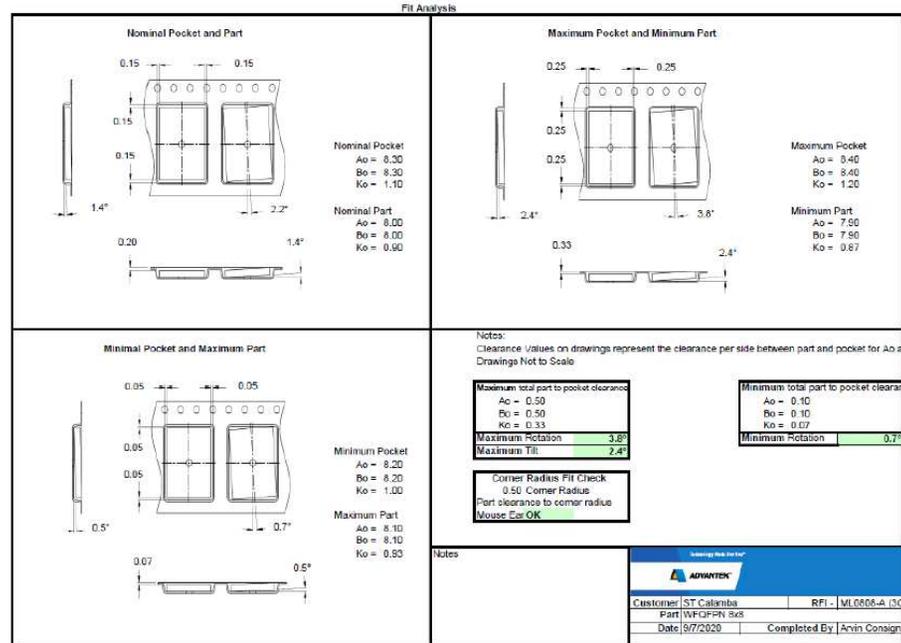


Results : Passed

Sufficient clearance available between leads and carrier tape cavity

Conclusion

Based on above material qualification, the 16mm carrier tape from Advantek for QFN 8x8x1mm with drawing number ML0808-A passed the Tape and Reel processing requirements.



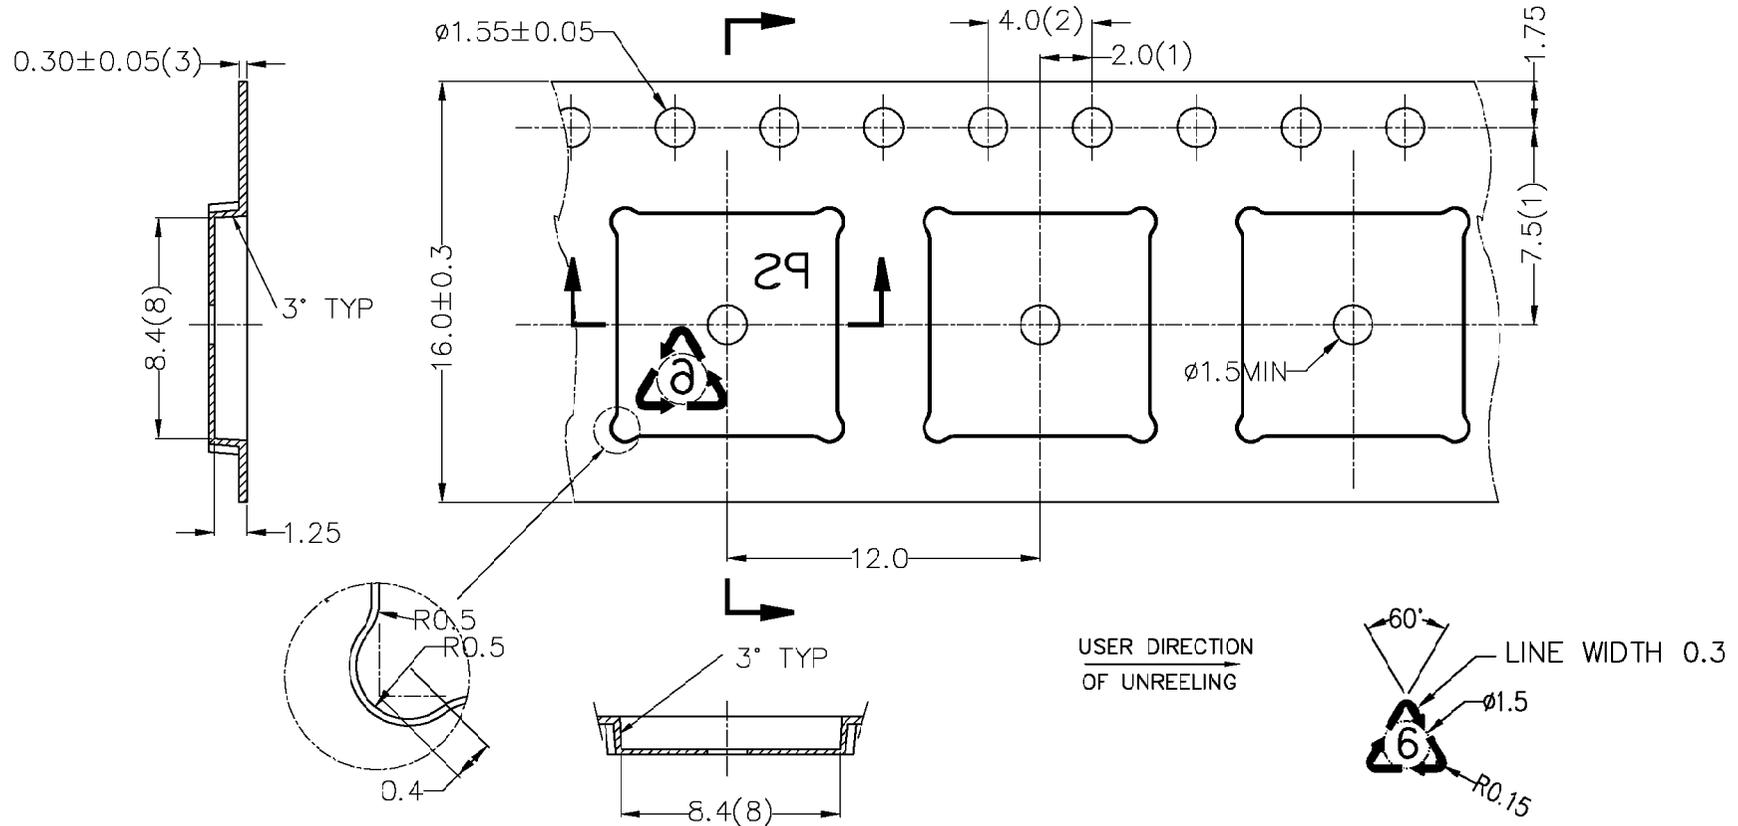

NOTES:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ± 0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
- 4. MATERIAL: POLYSTYRENE+CARBON BLACK
- 5. DIM IN MM
- 6. ALLOWABLE CAMBER AS PER EIA-481-D.
- 7. UNLESS OTHERWISE SPECIFIED, TOLERANCE ± 0.10
- (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET .
- (9) KO MEASUREMENT POINT SHOULD NOT BE REFERED ON POCKET RIDGE.
- 10. SURFACE RESISTIVITY FROM 1.0×10^5 TO 1.0×10^1 OH-MS/SQ

Ao:	8.4mm
Bo:	8.4mm
Ko:	1.25mm



PEAK PEAK PLASTIC & METAL PRODUCTS INT'L LTD.


REV.NO.	ECN #	DESCRIPTION	DATE
0		RELEASED FOR PRODUCTION	17 APR 09

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PEAK PLASTIC & METAL PRODUCTS (INTERNATIONAL) LIMITED. REPRODUCTION, DISCLOSURE OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED EXCEPT IF OTHERWISE AGREED UPON IN WRITING.

DRAWN BY : Steven	PAGE 1 OF 1
CHECKED BY : BUSH	DATE : 17 APR 09
APPROVED BY :	DATE : 17 APR 09
APPROVED BY :	DATE : 17 APR 09
APPROVED BY :	CODE : PTC12910

CUSTOMER :	PEAK
TITLE :	CT3-8X8-16-12.0-A1-XX
DWG NO.:	CT3-8X8-16-12.0-A1-XX
REV. 0	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Drawing format change	1/23/01	BTH

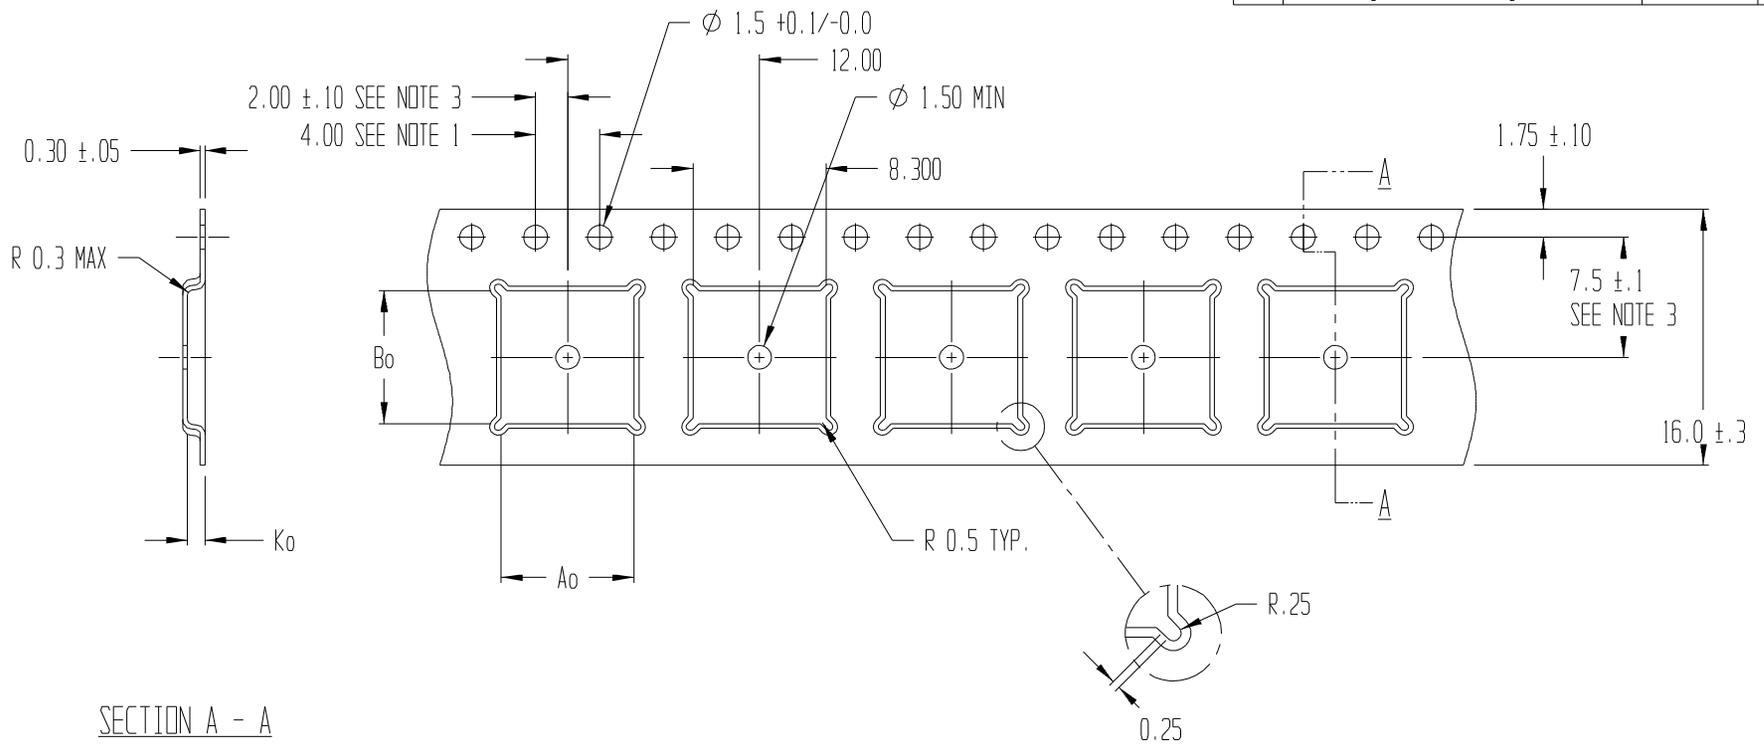

SECTION A - A

$A_o = 8.30$
 $B_o = 8.30$
 $K_o = 1.10$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

ADVANTEK			
TITLE ADVANTEK PART DRAWING NUMBER MLO808-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10		MATERIAL PS+C	
		ALL DIMENSIONS IN MILLIMETERS	DWG SIZE B
DRAWN BY TMD/BTH	DATE 10/8/99	SCALE 3:1	SHEET 1 OF 1
REFERENCE NO. T-9207	DWG NO. T102534AT	REV 1	