



STRAIN RELIEF BUSHES

Bushes in black Nylon 6/6, flame retardant to UL94V-2, designed to firmly grip and protect cables through panel entry. Choice of six types to cover a range of panel thickness up to 3.2mm.

- ◆ Firmly grip and protect cables through panel entry
- ◆ Flame retardant Nylon
- ◆ Six types to cover panels up to 3.2mm thick
- ◆ Colour **Black**

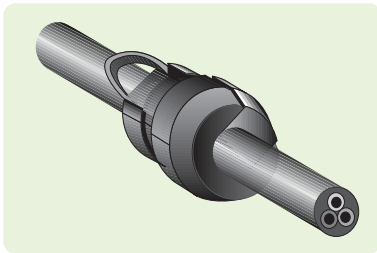

Dimensions (mm)

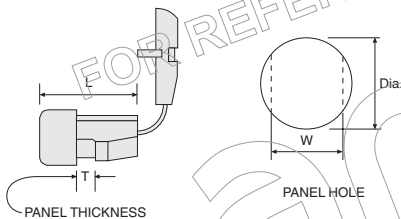

| Type | Cable dia. | L | T | W | Dia. |
|------|------------|------|-----------|------|------|
| 7/16 | 6.2 – 7.4 | 11.0 | 0.5 – 1.6 | 11.5 | 12.7 |
| 7/25 | 6.2 – 7.4 | 11.0 | 1.8 – 2.5 | 11.5 | 12.7 |
| 8/16 | 7.4 – 8.2 | 14.8 | 0.5 – 1.6 | 14.0 | 15.9 |
| 8/32 | 7.4 – 8.2 | 14.8 | 1.9 – 3.2 | 14.0 | 15.9 |
| 9/16 | 8.2 – 9.2 | 14.8 | 0.5 – 1.6 | 14.0 | 15.9 |
| 9/32 | 8.2 – 9.2 | 14.8 | 1.9 – 3.2 | 14.0 | 15.9 |

| Type | Manf. Part No. | anglia Order Code |
|------|----------------|-------------------|
| 7/16 | 04A716A | 669207 |
| 7/25 | 04A725A | 669206 |
| 8/16 | 04A816A | 669208 |
| 8/32 | 04A832A | 669209 |
| 9/16 | 04A916A | 669210 |
| 9/32 | 04A932A | 669211 |

SNAP BUSHING

Snap-fit bushes in black Nylon 6/6, flame retardant to UL94V-2, designed to protect cables through raw-edged panel holes. Simply lock into position with fingertip pressure. Choice of six types to cover panel holes up to 25.1mm dia.



- ◆ Insulate and smooth raw-edged holes to protect cables through panel entry
- ◆ Flame retardant Nylon
- ◆ Six types to cover panel holes up to 25.1mm dia.
- ◆ Suitable for panel thickness of 0.8mm to 3.2mm
- ◆ Colour **Black**

| Mounting Hole Dia. (mm) | Bush Hole Dia. (mm) | Bush Dia. (mm) | Bush Length (mm) | Manf. Part No. | anglia Order Code |
|-------------------------|---------------------|----------------|------------------|----------------|-------------------|
| 9.5 | 6.3 | 12.0 | 10.3 | 04C095A | 669231 |
| 13.0 | 8.2 | 14.5 | 10.3 | 04C013A | 669232 |
| 15.9 | 12.2 | 18.6 | 10.3 | 04C016A | 669233 |
| 18.9 | 14.3 | 21.5 | 10.3 | 04C019A | 669234 |
| 22.0 | 17.3 | 23.8 | 11.5 | 04C022A | 669235 |
| 25.1 | 19.1 | 28.0 | 11.5 | 04C025A | 669236 |

HOLE PLUGS

Snap-fit bushes in black Nylon 6/6, flame retardant to UL94V-2, designed to close off unused panel holes. Simply lock into position with fingertip pressure. Choice of six types to cover panel holes up to 25mm dia.



- ◆ Close off unused holes
- ◆ Flame retardant Nylon
- ◆ Six types to cover panel holes up to 25mm dia.
- ◆ Suitable for panel thickness of 0.8mm to 3.2mm
- ◆ Colour **Black**

| Mounting Hole Dia. (mm) | Bush Dia. (mm) | Bush Length (mm) | Manf. Part No. | anglia Order Code |
|-------------------------|----------------|------------------|----------------|-------------------|
| 10.0 | 13.0 | 10.5 | 04B010A | 669241 |
| 13.0 | 16.9 | 10.5 | 04B013A | 669242 |
| 16.0 | 19.8 | 10.5 | 04B016A | 669243 |
| 19.0 | 22.9 | 10.5 | 04B019A | 669244 |
| 22.0 | 24.9 | 11.3 | 04B022A | 669245 |
| 25.0 | 28.3 | 11.5 | 04B025A | 669246 |